

TOKAI®

JU HE INDUSTRY CO.,LTD.



MANUFACTURER
Of Industrial Pneumatic Tools



About JU-HE

With 35 years' experiences of manufacturing well-known-brand industrial pneumatic tools, our Chairman, Ting-Yuan, Chen, leading with the R&D teams, established JU-HE Industry Co., Ltd. in 2006.

By integrating the resources and extending the core technology, we design and manufacture all kinds of industrial pneumatic tools. As our products are conformed to International Quality Accreditation-ISO9001, we also create our own brand— TOKAI and carry forward to all over the world.

Based on the faith of "Continuous improvement" and achievement of "Customer Satisfaction", we constantly work on developing, manufacturing and promoting the quality of products. By means of the most sophisticated and reliable products, we also keep providing customers with the best service and striving to achieve perfection.

Management Philosophy

Ever since the foundation, our company has faithfully followed the spirit of "Good Business Practice" with four business concepts.

Integrity : Stable organization and permanent business development goals.

Professional : High quality products and service.

Service: Technical support and good communication channel.

Quality : Complete production process and quality inspection procedure.



Quality Control

Quality Control tests in each manufacturing process.

Our quality control technicians will do the sampling inspection at designated times in order to ensure that all products are under the best condition. Also, our production line technicians always control thoroughly the quality of all products.

In order to provide our customers products with high quality, we utilize a set of system for Quality Control which is conformed to International Standard.

With this system, we can do a complete record for our products and for the further tracking in the future.



R&D Team

Owing to the spirit of “Continual Innovation” and achievement of “Customer Satisfaction”, we always provide our customers products with high quality. We also have a set of systems for R&D and for Quality Control which help us design industrial pneumatic tools and develop new devices stably. .

Manufacturing

With different kinds of precision processing machinery and measuring equipment, we can be able to ensure the stability and the consistency of our products.





01

Maintenance
Automotive
Impact Wrench
1~10

02

Maintenance
Automotive
Ratchet Wrench
11~16

03

Maintenance
Automotive Tools
17~32

04

Professional
production
Screw Driver
33~35

36~56
Industrial
Production
Tools

05

THE BEST CHOICE



Maintenance Automotive Impact Wrench

Air Impact Wrench
Mini Impact Wrench
Composite Impact Wrench



JHB-1095

450 ft-lb (610 Nm) Composite material lightest mode , Twin hammer impact mechanism , Operate forward/reverse switch with one hand , Rotor blades attached with springs desing.

JHB-1079

550 ft-lb (742 Nm) Composite material lightest model , Rotor blades attached with springs desing , Simple structure desing.

JHB-1015

1,050 ft-lb (1,417 Nm) Composite material lightest model , Rotor blades attached with springs desing , Simple structure desing.

JHB-1077

1,500 ft-lb (2,033 Nm) Composite material lightest model , Rotor blades attached with springs desing , Simple structure desing.

JHB-1038-6

2,200 ft-lb (2,982 Nm) Aluminum material lightest model , Rotor blades attached with springs desing , Twin hammer impact mechanism



雙環式打擊結構，扭力輸出頻率穩定，特殊強化處理壽命高。

Twin hammer impact mechanism to perform best to torque output, and Special Hardened-Treatment to maintain best durability.



鈦合金前護蓋，增強其耐用度與安全性 (JHB-1063)

Titanium clutch case to re-enforce the strength (JHB-1063)



塑鋼本體重量輕，本體握把設計符合人體工學。

Composite handle to provide best power-to-weight ratio, and prevent uncomfortable usage during temperature change.

葉片彈簧裝置設計，使葉片 100% 附著於汽缸表面，可避免啟動卡死與扭力不足的問題。

Vane with spring mounted to prevent dead-lock or power-less problem.

汽缸材質為球墨鑄鐵耐磨性嘉

汽缸前後蓋鋁合金材質，表面特殊處理耐磨性嘉。

Special Hardened-Treated Cylinder

Front Plate and Rear plate to generate best durability.



正轉三檔轉速切換，逆轉一檔

3 different speed adjustment at Forward direction, 1 full speed at Reverse direction.



進氣接頭可360度旋轉，此設計可避免氣管打結。

360 degree swivel air inlet to prevent air hose twisted.

1/2"鋁合金衝擊扳手 1/2" Aluminum Impact Wrench



JHB-1031



衝擊結構	Impact Type	Twin Hammer	
傳動尺寸	Anvil Size	1/2 inch	
空轉轉速	Free Speed	8,000 rpm	
工作扭力	Working Torque	450 ft-lb @5 Sec.	610 Nm @5 Sec.
最大扭力	Max. Torque	550 ft-lb @15 Sec.	745 Nm @15 Sec.
工具重量	Product Weight	2.6 kg	5.7 lb
工具長度	Product Length	188 mm	7.40 inch
空氣消耗	Air Consumption	141 l/min	5.0 cfm
進氣壓力	Air Inlet Pressure	6.3 kg/cm2	90 psi
進氣接頭	Air Inlet Size	1/4 inch	
風管內徑	Air Hose I.D.	3/8 inch	
噪音值	Sound Pressure	97.5 dB(A)	
震動值	Vibration Level	6.8 m/s2	

10PCS/CTN 29/30 KG CUFT 1.6'

1/2"鋁合金衝擊扳手
1/2" Aluminum Impact Wrench



Front Exhaust

JHB-1031L

加長 50 mm
Extended 2"

衝擊結構	Impact Type	Twin Hammer	
傳動尺寸	Anvil Size	1/2 inch	
空轉轉速	Free Speed	8,000 rpm	
工作扭力	Working Torque	450 ft-lb @ 5 Sec.	610 Nm @ 5 Sec.
最大扭力	Max. Torque	550 ft-lb @15 Sec.	745 Nm @15 Sec.
工具重量	Product Weight	2.7 kg	5.9 lb
工具長度	Product Length	239 mm	9.40 inch
空氣消耗	Air Consumption	141 l/min	5.0 cfm
進氣壓力	Air Inlet Pressure	6.3 kg/cm2	90 psi
進氣接頭	Air Inlet Size	1/4 inch	
風管內徑	Air Hose I.D.	3/8 inch	
噪音值	Sound Pressure	97.5 dB(A)	
震動值	Vibration Level	6.8 m/s2	

10PCS/CTN 30/31 KG CUFT 1.65'

1/2"鋁合金衝擊扳手
1/2" Aluminum Impact Wrench



Handle Exhaust

JHB-1032



衝擊結構	Impact Type	Twin Hammer	
傳動尺寸	Anvil Size	1/2 inch	
空轉轉速	Free Speed	8,000 rpm	
工作扭力	Working Torque	450 ft-lb @ 5 Sec.	610 Nm @ 5 Sec.
最大扭力	Max. Torque	550 ft-lb @15 Sec.	745 Nm @15 Sec.
工具重量	Product Weight	2.6 kg	5.7 lb
工具長度	Product Length	188 mm	7.40 inch
空氣消耗	Air Consumption	141 l/min	5.0 cfm
進氣壓力	Air Inlet Pressure	6.3 kg/cm2	90 psi
進氣接頭	Air Inlet Size	1/4 inch	
風管內徑	Air Hose I.D.	3/8 inch	
噪音值	Sound Pressure	95.5 dB(A)	
震動值	Vibration Level	6.8 m/s2	

10PCS/CTN 29/30 KG CUFT 1.6'

1/2"鋁合金衝擊扳手
1/2" Aluminum Impact Wrench



Handle Exhaust

JHB-1032L

加長 50 mm
Extended 2"

衝擊結構	Impact Type	Twin Hammer	
傳動尺寸	Anvil Size	1/2 inch	
空轉轉速	Free Speed	8,000 rpm	
工作扭力	Working Torque	450 ft-lb @ 5 Sec.	610 Nm @ 5 Sec.
最大扭力	Max. Torque	550 ft-lb @15 Sec.	745 Nm @15 Sec.
工具重量	Product Weight	2.7 kg	5.9 lb
工具長度	Product Length	239 mm	9.40 inch
空氣消耗	Air Consumption	141 l/min	5.0 cfm
進氣壓力	Air Inlet Pressure	6.3 kg/cm2	90 psi
進氣接頭	Air Inlet Size	1/4 inch	
風管內徑	Air Hose I.D.	3/8 inch	
噪音值	Sound Pressure	97.5 dB(A)	
震動值	Vibration Level	6.8 m/s2	

10PCS/CTN 30/31 KG CUFT 1.65'

1/4"迷你塑鋼衝擊扳手▶

1/4" Mini Composite Impact Wrench



JHB-1059

衝擊結構	Impact Type	Two Hammer	
傳動尺寸	Anvil Size	1/4 inch	
空轉轉速	Free Speed	13,000 rpm	
工作扭力	Working Torque	30 ft-lb	40 Nm
最大扭力	Max. Torque	50 ft-lb	68 Nm
工具重量	Product Weight	0.65 kg	1.4 lb
工具長度	Product Length	166 mm	6.53 inch
空氣消耗	Air Consumption	84 l/min	3 cfm
進氣壓力	Air Inlet Pressure	6.3 kg/cm2	90 psi
進氣接頭	Air Inlet Size	1/4 inch	
風管內徑	Air Hose I.D.	3/8 inch	
噪音值	Sound Pressure	85 dB(A)	
震動值	Vibration Level	<2.5 m/s2	

20PCS/CTN 15.5/16.5 KG CUFT 1.2'

1/4"迷你塑鋼衝擊扳手組▶

1/4" Mini Composite Impact Wrench Kit



JHK-1059

配件明細	Accessories	1 pc JHB-1059
		1 pc D.R 1/4" Sockets 8mm(L=50mm)
		1 pc D.R 1/4" Sockets 9mm(L=50mm)
		1 pc D.R 1/4" Sockets 10mm(L=50mm)
		1 pc D.R 1/4" Sockets 11mm(L=50mm)
		1 pc D.R 1/4" Sockets 12mm(L=50mm)
		1 pc D.R 1/4" Sockets 13mm(L=50mm)
		1 pc D.R 1/4" 50 mm Ext.Bar
		1 pc D.R 1/4" 125 mm Ext.Bar
		1 pc D.R 1/4" Universal Joint
		1 pc 1/4" Air Inlet

1/2"短小塑鋼衝擊扳手▶

1/2" Stubby Composite Impact Wrench



JHB-1095



衝擊結構	Impact Type	Twin Hammer	
傳動尺寸	Anvil Size	1/2 inch	
空轉轉速	Free Speed	10,000 rpm	
工作扭力	Working Torque	350 ft-lb @5 Sec.	472 Nm @5 Sec.
最大扭力	Max. Torque	450 ft-lb @15 Sec.	610 Nm @15 Sec.
工具重量	Product Weight	1.25 kg	2.7 lb
工具長度	Product Length	125 mm	4.92 inch
空氣消耗	Air Consumption	115 l/min	4.0 cfm
進氣壓力	Air Inlet Pressure	6.3 kg/cm2	90 psi
進氣接頭	Air Inlet Size	1/4 inch	
風管內徑	Air Hose I.D.	3/8 inch	
噪音值	Sound Pressure	90.5 dB(A)	
震動值	Vibration Level	3.7 m/s2	

10PCS/CTN 13.6/14.6 KG CUFT 0.9'

3/8"塑鋼衝擊扳手
3/8" Composite Impact Wrench



JHB-1064

衝擊結構	Impact Type	Twin Hammer	
傳動尺寸	Anvil Size	3/8 inch	
空轉轉速	Free Speed	8,000 rpm	
工作扭力	Working Torque	400 ft-lb @5 Sec.	542 Nm @5 Sec.
最大扭力	Max. Torque	450 ft-lb @15 Sec.	610 Nm @15 Sec.
工具重量	Product Weight	1.3 kg	2.8 lb
工具長度	Product Length	160 mm	6.29 inch
空氣消耗	Air Consumption	129 l/min	4.5 cfm
進氣壓力	Air Inlet Pressure	6.3 kg/cm2	90 psi
進氣接頭	Air Inlet Size	1/4 inch	
風管內徑	Air Hose I.D.	3/8 inch	
噪音值	Sound Pressure	89.5 dB(A)	
震動值	Vibration Level	4.7 m/s2	

10PCS/CTN 14.3/15.3 KG CUFT 0.9'

1/2"迷你塑鋼衝擊扳手
1/2" Mini Composite Impact Wrench



JHB-1079



衝擊結構	Impact Type	Twin Hammer	
傳動尺寸	Anvil Size	1/2 inch	
空轉轉速	Free Speed	11,000 rpm	
工作扭力	Working Torque	450 ft-lb @5 Sec.	610 Nm @5 Sec.
最大扭力	Max. Torque	550 ft-lb @15 Sec.	745 Nm @15 Sec.
工具重量	Product Weight	1.3 kg	2.8 lb
工具長度	Product Length	160 mm	6.29 inch
空氣消耗	Air Consumption	129 l/min	4.5 cfm
進氣壓力	Air Inlet Pressure	6.3 kg/cm2	90 psi
進氣接頭	Air Inlet Size	1/4 inch	
風管內徑	Air Hose I.D.	3/8 inch	
噪音值	Sound Pressure	89.5 dB(A)	
震動值	Vibration Level	4.7 m/s2	

10PCS/CTN 14.7/15.7 KG CUFT 0.9'

1/2"迷你塑鋼衝擊扳手組
1/2" Mini Composite Impact Wrench Kit



JHK-1079

配件明細	Accessories	1 pc JHB-1079
		1+1 pc D.R 1/2" Sockets 9mm+10mm
		1+1 pc D.R 1/2" Sockets 11mm+12mm
		1+1 pc D.R 1/2" Sockets 13mm+14mm
		1+1 pc D.R 1/2" Sockets 17mm+19mm
		1+1 pc D.R 1/2" Sockets 21mm+22mm
		1+1 pc D.R 1/2" Sockets 24mm+27mm
		1 pc D.R 1/2" 125 mm Ext.Bar
		1 pc D.R 1/2" Universal Join
		1 pc 1/4" Air Inlet
		1 pc Mini Oiler

1/2"塑鋼衝擊扳手
1/2" Composite Impact Wrench



1/2"塑鋼衝擊扳手
1/2" Composite Impact Wrench



1/2"塑鋼衝擊扳手組
1/2"Composite Impact Wrench Kit



JHB-1015



衝擊結構	Impact Type	Twin Hammer	
傳動尺寸	Anvil Size	1/2 inch	
空轉轉速	Free Speed	8,500 rpm	
工作扭力	Working Torque	650 ft-lb @5 Sec.	881 Nm @5 Sec.
最大扭力	Max. Torque	820 ft-lb @15 Sec.	1,111 Nm @15 Sec
工具重量	Product Weight	2.1 kg	4.6 lb
工具長度	Product Length	190 mm	7.48 inch
空氣消耗	Air Consumption	158 l/min	5.5 cfm
進氣壓力	Air Inlet Pressure	6.3 kg/cm2	90 psi
進氣接頭	Air Inlet Size	1/4 inch	
風管內徑	Air Hose I.D.	3/8 inch	
噪音值	Sound Pressure	91.5 dB(A)	
震動值	Vibration Level	8.1 m/s2	

10PCS/CTN 23.5/24.5 KG CUFT 1.6'



JHB-1015L

加長 50 mm
Extended 2"

衝擊結構	Impact Type	Twin Hammer	
傳動尺寸	Anvil Size	1/2 inch	
空轉轉速	Free Speed	8,500 rpm	
工作扭力	Working Torque	650 ft-lb @5 Sec.	881 Nm @5 Sec.
最大扭力	Max. Torque	820 ft-lb @15 Sec.	1,111 Nm @15 Sec
工具重量	Product Weight	2.1 kg	4.6 lb
工具長度	Product Length	190 mm	7.48 inch
空氣消耗	Air Consumption	158 l/min	5.5 cfm
進氣壓力	Air Inlet Pressure	6.3 kg/cm2	90 psi
進氣接頭	Air Inlet Size	1/4 inch	
風管內徑	Air Hose I.D.	3/8 inch	
噪音值	Sound Pressure	91.5 dB(A)	
震動值	Vibration Level	8.1 m/s2	

10PCS/CTN 23.5/24.5 KG CUFT 1.6'



JHK-1015

配件明細	Accessories	1 pc JHB-1015
		1+1 pc D.R 1/2" Sockets 9mm+10mm
		1+1 pc D.R 1/2" Sockets 11mm+12mm
		1+1 pc D.R 1/2" Sockets 13mm+14mm
		1+1 pc D.R 1/2" Sockets 17mm+19mm
		1+1 pc D.R 1/2" Sockets 21mm+22mm
		1+1 pc D.R 1/2" Sockets 24mm+27mm
		1 pc D.R 1/2" 125 mm Ext.Bar
		1 pc D.R 1/2" Universal Join
		1 pc 1/4" Air Inlet
		1 pc Mini Oiler

1/2" 鈦合金塑鋼衝擊板手
1/2" Titanium Composite Impact Wrench



JHB-1063

衝擊結構	Impact Type	Twin Hammer	
傳動尺寸	Anvil Size	1/2 inch	
空轉轉速	Free Speed	8,500 rpm	
工作扭力	Working Torque	650 ft-lb @ 5 Sec.	881 Nm @ 5 Sec.
最大扭力	Max. Torque	820 ft-lb @ 15 Sec.	1,111 Nm @ 15 Sec.
工具重量	Product Weight	2.2 kg	4.8 lb
工具長度	Product Length	190 mm	7.48 inch
空氣消耗	Air Consumption	158 l/min	5.5 cfm
進氣壓力	Air Inlet Pressure	6.3 kg/cm2	90 psi
進氣接頭	Air Inlet Size	1/4 inch	
風管內徑	Air Hose I.D.	3/8 inch	
噪音值	Sound Pressure	91.5 dB(A)	
震動值	Vibration Level	8.1 m/s2	

10PCS/CTN 24/25 KG CUFT 1.6'

3/4" 迷你塑鋼衝擊板手
3/4" Mini Composite Impact Wrench



JHB-1035

衝擊結構	Impact Type	Twin Hammer	
傳動尺寸	Anvil Size	3/4 inch	
空轉轉速	Free Speed	8,500 rpm	
工作扭力	Working Torque	650 ft-lb @ 5 Sec.	881 Nm @ 5 Sec.
最大扭力	Max. Torque	820 ft-lb @ 15 Sec.	1,111 Nm @ 15 Sec.
工具重量	Product Weight	2.3 kg	5.0 lb
工具長度	Product Length	200 mm	7.87 inch
空氣消耗	Air Consumption	158 l/min	5.5 cfm
進氣壓力	Air Inlet Pressure	6.3 kg/cm2	90 psi
進氣接頭	Air Inlet Size	1/4 inch	
風管內徑	Air Hose I.D.	3/8 inch	
噪音值	Sound Pressure	91.5 dB(A)	
震動值	Vibration Level	8.1 m/s2	

10PCS/CTN 24.5/25.5 KG CUFT 1.6'

3/4" 塑鋼衝擊板手
3/4" Composite Impact Wrench



JHB-1077



衝擊結構	Impact Type	Twin Hammer	
傳動尺寸	Anvil Size	3/4 inch	
空轉轉速	Free Speed	5,500 rpm	
工作扭力	Working Torque	1,200 ft-lb @ 5 Sec.	1,627 Nm @ 5 Sec.
最大扭力	Max. Torque	1,500 ft-lb @ 15 Sec.	2,033 Nm @ 15 Sec.
工具重量	Product Weight	3.7 kg	8.1 lb
工具長度	Product Length	220 mm	8.10 inch
空氣消耗	Air Consumption	198 l/min	7.0 cfm
進氣壓力	Air Inlet Pressure	6.3 kg/cm2	90 psi
進氣接頭	Air Inlet Size	3/8 inch	
風管內徑	Air Hose I.D.	3/8 inch	
噪音值	Sound Pressure	96.5 dB(A)	
震動值	Vibration Level	8.6 m/s2	

6PCS/CTN 23.3/24.3 KG CUFT 1.3'

3/4"塑鋼衝擊扳手
3/4" Composite Impact Wrench



Handle Exhaust

JHB-1077-3 加長 76 mm
Extended 3"

衝擊結構	Impact Type	Twin Hammer	
傳動尺寸	Anvil Size	3/4 inch	
空轉轉速	Free Speed	5,500 rpm	
工作扭力	Working Torque	1,200 ft-lb @5 Sec.	1,627 Nm @5 Sec.
最大扭力	Max. Torque	1,500 ft-lb @15 Sec.	2,033 Nm @15 Sec.
工具重量	Product Weight	4.2 kg	9.2 lb
工具長度	Product Length	296 mm	11.65 inch
空氣消耗	Air Consumption	198 l/min	7.0 cfm
進氣壓力	Air Inlet Pressure	6.3 kg/cm2	90 psi
進氣接頭	Air Inlet Size	3/8 inch	
風管內徑	Air Hose I.D.	3/8 inch	
噪音值	Sound Pressure	96.5 dB(A)	
震動值	Vibration Level	8.6 m/s2	

6PCS/CTN 25.9/26.9 KG CUFT 2'

3/4"塑鋼衝擊扳手
3/4" Composite Impact Wrench



Handle Exhaust

JHB-1077-6 加長 152 mm
Extended 6"

衝擊結構	Impact Type	Twin Hammer	
傳動尺寸	Anvil Size	3/4 inch	
空轉轉速	Free Speed	5,500 rpm	
工作扭力	Working Torque	1,200 ft-lb @5 Sec.	1,627 Nm @5 Sec.
最大扭力	Max. Torque	1,500 ft-lb @15 Sec.	2,033 Nm @15 Sec.
工具重量	Product Weight	4.7 kg	10.3 lb
工具長度	Product Length	373 mm	14.68 inch
空氣消耗	Air Consumption	198 l/min	7.0 cfm
進氣壓力	Air Inlet Pressure	6.3 kg/cm2	90 psi
進氣接頭	Air Inlet Size	3/8 inch	
風管內徑	Air Hose I.D.	3/8 inch	
噪音值	Sound Pressure	96.5 dB(A)	
震動值	Vibration Level	8.6 m/s2	

6PCS/CTN 28.4/29.4 KG CUFT 2'

1"迷你塑鋼衝擊扳手
1" Mini Composite Impact Wrench



Handle Exhaust

JHB-1078



衝擊結構	Impact Type	Twin Hammer	
傳動尺寸	Anvil Size	1 inch	
空轉轉速	Free Speed	5,500 rpm	
工作扭力	Working Torque	1,200 ft-lb @5 Sec.	1,627 Nm @5 Sec.
最大扭力	Max. Torque	1,500 ft-lb @15 Sec.	2,033 Nm @15 Sec.
工具重量	Product Weight	3.8 kg	8.3 lb
工具長度	Product Length	230 mm	9.10 inch
空氣消耗	Air Consumption	198 l/min	7.0 cfm
進氣壓力	Air Inlet Pressure	6.3 kg/cm2	90 psi
進氣接頭	Air Inlet Size	3/8 inch	
風管內徑	Air Hose I.D.	3/8 inch	
噪音值	Sound Pressure	96.5 dB(A)	
震動值	Vibration Level	8.6 m/s2	

6PCS/CTN 23.9/24.9 KG CUFT 1.3'

1"迷你塑鋼衝擊板手
1" Mini Composite Impact Wrench



葉片彈簧裝置
Blade with spring mounted

JHB-1078-6 加長 152 mm
Extended 6"

衝擊結構	Impact Type	Twin Hammer	
傳動尺寸	Anvil Size	1inch	
空轉轉速	Free Speed	5,500 rpm	
工作扭力	Working Torque	1,200 ft-lb @ 5 Sec.	1,627 Nm @ 5 Sec.
最大扭力	Max. Torque	1,500 ft-lb @ 15 Sec.	2,033 Nm @ 15 Sec.
工具重量	Product Weight	5.0 kg	10.1 lb
工具長度	Product Length	383 mm	15.08 inch
空氣消耗	Air Consumption	198 l/min	7.0 cfm
進氣壓力	Air Inlet Pressure	6.3 kg/cm2	90 psi
進氣接頭	Air Inlet Size	3/8 inch	
風管內徑	Air Hose I.D.	3/8 inch	
噪音值	Sound Pressure	96.5 dB(A)	
震動值	Vibration Level	8.6 m/s2	

6PCS/CTN 30.2/31.2 KG CUFT 2'

1"鋁合金衝擊板手
1" Aluminum Impact Wrench



葉片彈簧裝置
Blade with spring mounted

JHB-1038

衝擊結構	Impact Type	Twin Hammer	
傳動尺寸	Anvil Size	1 inch	
空轉轉速	Free Speed	3,600 rpm	
工作扭力	Working Torque	1,800 ft-lb @ 5 Sec.	2,440 Nm @ 5 Sec.
最大扭力	Max. Torque	2,200 ft-lb @ 15 Sec.	2,982 Nm @ 15 Sec.
工具重量	Product Weight	10.5 kg	23.6 lb
工具長度	Product Length	398 mm	15.66 inch
空氣消耗	Air Consumption	312 l/min	11.0 cfm
進氣壓力	Air Inlet Pressure	6.3 kg/cm2	90 psi
進氣接頭	Air Inlet Size	1/2 inch	
風管內徑	Air Hose I.D.	1/2 inch	
噪音值	Sound Pressure	101.5 dB(A)	
震動值	Vibration Level	15.3 m/s2	

2PCS/CTN 21/22 KG CUFT 1.5'

1"鋁合金衝擊板手
1" Aluminum Impact Wrench



葉片彈簧裝置
Blade with spring mounted

JHB-1038-6 加長 152 mm
Extended 6"

衝擊結構	Impact Type	Twin Hammer	
傳動尺寸	Anvil Size	1inch	
空轉轉速	Free Speed	3,600 rpm	
工作扭力	Working Torque	1,800 ft-lb @ 5 Sec.	2,440 Nm @ 5 Sec.
最大扭力	Max. Torque	2,200 ft-lb @ 15 Sec.	2,982 Nm @ 15 Sec.
工具重量	Product Weight	11.7 kg	25.8 lb
工具長度	Product Length	550 mm	21.65 inch
空氣消耗	Air Consumption	312 l/min	11.0 cfm
進氣壓力	Air Inlet Pressure	6.3 kg/cm2	90 psi
進氣接頭	Air Inlet Size	1/2 inch	
風管內徑	Air Hose I.D.	1/2 inch	
噪音值	Sound Pressure	101.5 dB(A)	
震動值	Vibration Level	15.3 m/s2	

2PCS/CTN 23/24 KG CUFT 1.5'

1"重力鋁合金衝擊扳手
1" Heavy Duty Aluminum Impact Wrench



葉片彈簧裝置
Blade with spring mounted


Side Exhaust

JHB-1075

衝擊結構	Impact Type	Pin Less	
傳動尺寸	Anvil Size	1inch	
空轉轉速	Free Speed	4,000 rpm	
工作扭力	Working Torque	2,000 ft-lb @5 Sec.	2,711 Nm @5 Sec.
最大扭力	Max. Torque	2,500 ft-lb @15 Sec.	3,389 Nm @15 Sec.
工具重量	Product Weight	15.1 kg	33.3 lb
工具長度	Product Length	417 mm	16.42 inch
空氣消耗	Air Consumption	339 l/min	12.0 cfm
進氣壓力	Air Inlet Pressure	6.3 kg/cm2	90 psi
進氣接頭	Air Inlet Size	1/2 inch	
風管內徑	Air Hose I.D.	1/2 inch	
噪音值	Sound Pressure	115.5 dB(A)	
震動值	Vibration Level	18.3 m/s2	

1PCS/CTN 16/17 KG CUFT 0.83'

1"重力鋁合金衝擊扳手
1" Aluminum Impact Wrench

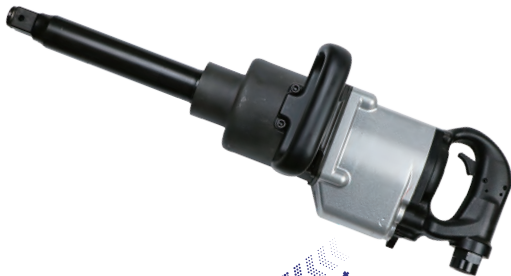

葉片彈簧裝置
Blade with spring mounted

Side Exhaust

JHB-1075-8

加長 203 mm
Extended 8"

衝擊結構	Impact Type	Pin Less	
傳動尺寸	Anvil Size	1inch	
空轉轉速	Free Speed	4,000 rpm	
工作扭力	Working Torque	2,000 ft-lb @5 Sec.	2,711 Nm @5 Sec.
最大扭力	Max. Torque	2,500 ft-lb @15 Sec.	3,389 Nm @15 Sec.
工具重量	Product Weight	16.7 kg	36.8 lb
工具長度	Product Length	620 mm	24.40 inch
空氣消耗	Air Consumption	339 l/min	12.0 cfm
進氣壓力	Air Inlet Pressure	6.3 kg/cm2	90 psi
進氣接頭	Air Inlet Size	1/2 inch	
風管內徑	Air Hose I.D.	1/2 inch	
噪音值	Sound Pressure	115.5 dB(A)	
震動值	Vibration Level	18.3 m/s2	

1PCS/CTN 17.3/18.3 KG CUFT 0.83'

1-1/2"重力鋁合金衝擊扳手
1-1/2" Heavy Duty Aluminum Impact Wrench



葉片彈簧裝置
Blade with spring mounted

Side Exhaust

JHB-1076

衝擊結構	Impact Type	Pin Less	
傳動尺寸	Anvil Size	1-1/2 inch	
空轉轉速	Free Speed	4,000 rpm	
工作扭力	Working Torque	2,000 ft-lb @5 Sec.	2,711 Nm @5 Sec.
最大扭力	Max. Torque	2,500 ft-lb @15 Sec.	3,389 Nm @15 Sec.
工具重量	Product Weight	15.3 kg	33.7 lb
工具長度	Product Length	620 mm	24.40 inch
空氣消耗	Air Consumption	339 l/min	12.0 cfm
進氣壓力	Air Inlet Pressure	6.3 kg/cm2	90 psi
進氣接頭	Air Inlet Size	1/2 inch	
風管內徑	Air Hose I.D.	1/2 inch	
噪音值	Sound Pressure	115.5 dB(A)	
震動值	Vibration Level	18.3 m/s2	


1PCS/CTN 16/17 KG CUFT 0.83'

THE BEST CHOICE



Maintenance Automotive Ratchet Wrench

Air Ratchet Wrench
Impact Ratchet Wrench
Through Hole Ratchet Wrench
Adjusted Ratchet Wrench

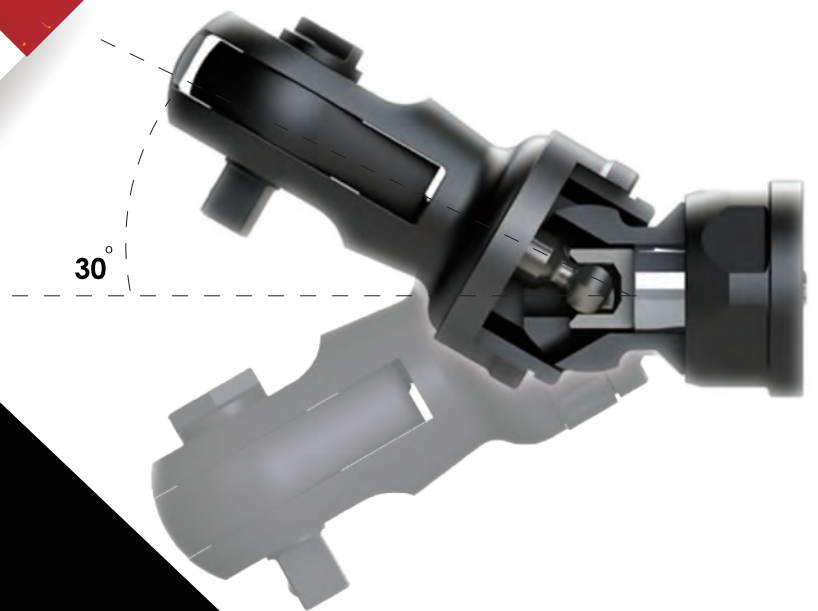

JHA-1129

Thru-Hole Ratchet Wrench Upgraded , More torque output and enhance the life.

JHA-1147

Adjustable Ratchet Wrench Upgraded , Invention Patent , More torque output and enhance the life.

JHA-1152

Brand New Extended Ratchet Wrench.

迷你氣動棘輪板手
Mini Air Ratchet Wrench



JHA-1024-2 (3)

傳動尺寸	Anvil Size	1/4 inch (3/8 inch)	
空轉轉速	Free Speed	300 rpm	
工作扭力	Working Torque	10 ft-lb	13 Nm
最大扭力	Max. Torque	40 ft-lb	54 Nm
工具重量	Product Weight	0.5kg	1.1 lb
工具長度	Product Length	144 mm	5.66 inch
空氣消耗	Air Consumption	84 l/min	3 cfm
進氣壓力	Air Inlet Pressure	6.3 kg/cm2	90 psi
進氣接頭	Air Inlet Size	1/4 inch	
風管內徑	Air Hose I.D.	3/8 inch	
噪音值	Sound Pressure	84 dB(A)	
震動值	Vibration Level	4.5 m/s2	
20PCS/CTN 11.6/12.6 KG CUFT 1.1'			

氣動棘輪板手
Air Ratchet Wrench



JHA-1017-2 (3)			
傳動尺寸	Anvil Size	1/4 inch (3/8 inch)	
空轉轉速	Free Speed	300 rpm	
工作扭力	Working Torque	10 ft-lb	13 Nm
最大扭力	Max. Torque	40 ft-lb	54 Nm
工具重量	Product Weight	0.7 kg	1.5 lb
工具長度	Product Length	180 mm	7.08 inch
空氣消耗	Air Consumption	84 l/min	3 cfm
進氣壓力	Air Inlet Pressure	6.3 kg/cm2	90 psi
進氣接頭	Air Inlet Size	1/4 inch	
風管內徑	Air Hose I.D.	3/8 inch	
噪音值	Sound Pressure	84 dB(A)	
震動值	Vibration Level	4.5 m/s2	
20PCS/CTN 13.5/14.5 KG CUFT 1.1'			

氣動棘輪板手
Air Ratchet Wrench



JHA-1022-3 (4)			
傳動尺寸	Anvil Size	3/8 inch (1/2 inch)	
空轉轉速	Free Speed	160 rpm	
工作扭力	Working Torque	20 ft-lb	27 Nm
最大扭力	Max. Torque	60 ft-lb	81 Nm
工具重量	Product Weight	1.2 kg	2.6 lb
工具長度	Product Length	265 mm	10.43 inch
空氣消耗	Air Consumption	113 l/min	4 cfm
進氣壓力	Air Inlet Pressure	6.3 kg/cm2	90 psi
進氣接頭	Air Inlet Size	1/4 inch	
風管內徑	Air Hose I.D.	3/8 inch	
噪音值	Sound Pressure	83 dB(A)	
震動值	Vibration Level	6.5 m/s2	
20PCS/CTN 27/28 KG CUFT 1.7'			

氣動衝擊式棘輪扳手
Air Impact Ratchet Wrench



JHA-1018-3 (4)

傳動尺寸	Anvil Size	3/8 inch (1/2 inch)	
空轉轉速	Free Speed	500 rpm	
工作扭力	Working Torque	15 ft-lb	20 Nm
最大扭力	Max. Torque	50 ft-lb	67 Nm
工具重量	Product Weight	1.3 kg	2.8 lb
工具長度	Product Length	265 mm	10.43 inch
空氣消耗	Air Consumption	113 l/min	4 cfm
進氣壓力	Air Inlet Pressure	6.3 kg/cm2	90 psi
進氣接頭	Air Inlet Size	1/4 inch	
風管內徑	Air Hose I.D.	3/8 inch	
噪音值	Sound Pressure	83 dB(A)	
震動值	Vibration Level	6.5 m/s2	

20PCS/CTN 29/30 KG CUFT 1.7'

穿孔式棘輪扳手
Thru-Hole Ratchet Wrench



JHA-1016



傳動尺寸	Anvil Size	內六角 (Inner Hex) 17mm	
空轉轉速	Free Speed	400 rpm	
工作扭力	Working Torque	10 ft-lb	13 Nm
最大扭力	Max. Torque	40 ft-lb	54 Nm
工具重量	Product Weight	0.6 kg	1.3 lb
工具長度	Product Length	210 mm	8.26 inch
空氣消耗	Air Consumption	84 l/min	3 cfm
進氣壓力	Air Inlet Pressure	6.3 kg/cm2	90 psi
進氣接頭	Air Inlet Size	1/4 inch	
風管內徑	Air Hose I.D.	3/8 inch	
噪音值	Sound Pressure	84 dB(A)	
震動值	Vibration Level	3.5 m/s2	

20PCS/CTN 16/17 KG CUFT 1.1'

穿孔式棘輪扳手組
Thru-Hole Ratchet Wrench Kit



JHK-1016

配件明細	Accessories	1 pc JHA-1016
		10pc Thru-hole Socket (8,10,12,13,14,15,16,18,19,21 mm)
		1 pc D.R 1/4" Adaptor
		1 pc D.R 3/8" Adaptor
		1 pc D.R 1/2" Adaptor
		1 pc 1/4" Bits Holder
		10pc Bit's Set
		1 pc Suspension Ring
		1 pc Mini Oiler
		1 pc 1/4" Air Inlet

迷你重載型棘輪扳手
Mini Heavy Duty Ratchet Wrench



JHA-1142

傳動尺寸	Anvil Size	1/4 inch (3/8 inch)	
空轉轉速	Free Speed	300 rpm	
工作扭力	Working Torque	10 ft-lb	13 Nm
最大扭力	Max. Torque	40 ft-lb	54 Nm
工具重量	Product Weight	0.44 kg	0.96 lb
工具長度	Product Length	166 mm	6.47 inch
空氣消耗	Air Consumption	84 l/min	3 cfm
進氣壓力	Air Inlet Pressure	6.3 kg/cm2	90 psi
進氣接頭	Air Inlet Size	1/4 inch	
風管內徑	Air Hose I.D.	3/8 inch	
噪音值	Sound Pressure	83 dB(A)	
震動值	Vibration Level	3.5 m/s2	

20PCS/CTN 11.6/12.6 KG CUFT 1.1'

重載型棘輪扳手
Heavy Duty Ratchet Wrench



JHA-1149-2 (3)

傳動尺寸	Anvil Size	1/4 inch (3/8 inch)	
空轉轉速	Free Speed	300 rpm	
工作扭力	Working Torque	10 ft-lb	13 Nm
最大扭力	Max. Torque	40 ft-lb	54 Nm
工具重量	Product Weight	0.64 kg	1.4 lb
工具長度	Product Length	202 mm	7.88 inch
空氣消耗	Air Consumption	84 l/min	3 cfm
進氣壓力	Air Inlet Pressure	6.3 kg/cm2	90 psi
進氣接頭	Air Inlet Size	1/4 inch	
風管內徑	Air Hose I.D.	3/8 inch	
噪音值	Sound Pressure	83 dB(A)	
震動值	Vibration Level	3.5 m/s2	

20PCS/CTN 13.5/14.5 KG CUFT 1.1'

重載型棘輪扳手
Heavy Duty Ratchet Wrench



JHA-1141-3 (4)

傳動尺寸	Anvil Size	3/8 inch (1/2 inch)	
空轉轉速	Free Speed	160 rpm	
工作扭力	Working Torque	25 ft-lb	34 Nm
最大扭力	Max. Torque	70 ft-lb	95 Nm
工具重量	Product Weight	1.3 kg	2.86 lb
工具長度	Product Length	254 mm	9.9 inch
空氣消耗	Air Consumption	113 l/min	4 cfm
進氣壓力	Air Inlet Pressure	6.3 kg/cm2	90 psi
進氣接頭	Air Inlet Size	1/4 inch	
風管內徑	Air Hose I.D.	3/8 inch	
噪音值	Sound Pressure	82 dB(A)	
震動值	Vibration Level	5.5 m/s2	

20PCS/CTN 29/30 KG CUFT 1.7'

重載型棘輪扳手
Heavy Duty Ratchet Wrench



JHA-1131-3 (4)

傳動尺寸	Anvil Size	3/8 inch (1/2 inch)	
空轉轉速	Free Speed	160 rpm	
工作扭力	Working Torque	25 ft-lb	34 Nm
最大扭力	Max. Torque	70 ft-lb	95 Nm
工具重量	Product Weight	1.2 kg	2.6 lb
工具長度	Product Length	273 mm	10.65 inch
空氣消耗	Air Consumption	113 l/min	4 cfm
進氣壓力	Air Inlet Pressure	6.3 kg/cm2	90 psi
進氣接頭	Air Inlet Size	1/4 inch	
風管內徑	Air Hose I.D.	3/8 inch	
噪音值	Sound Pressure	82 dB(A)	
震動值	Vibration Level	5.5 m/s2	

20PCS/CTN 27/28 KG CUFT 1.7'

重載型棘輪扳手
Heavy Duty Ratchet Wrench



JHA-1152-3 (4)

傳動尺寸	Anvil Size	3/8 inch (1/2 inch)	
空轉轉速	Free Speed	160 rpm	
工作扭力	Working Torque	25 ft-lb	34 Nm
最大扭力	Max. Torque	70 ft-lb	95 Nm
工具重量	Product Weight	1.63 kg	3.58 lb
工具長度	Product Length	390 mm	15.21 inch
空氣消耗	Air Consumption	113 l/min	4 cfm
進氣壓力	Air Inlet Pressure	6.3 kg/cm2	90 psi
進氣接頭	Air Inlet Size	1/4 inch	
風管內徑	Air Hose I.D.	3/8 inch	
噪音值	Sound Pressure	82 dB(A)	
震動值	Vibration Level	5.5 m/s2	

重載型棘輪扳手
Heavy Duty Ratchet Wrench



JHA-1147-3 (4)

傳動尺寸	Anvil Size	3/8 inch (1/2 inch)	
空轉轉速	Free Speed	160 rpm	
工作扭力	Working Torque	25 ft-lb	34 Nm
最大扭力	Max. Torque	70 ft-lb	95 Nm
工具重量	Product Weight	1.45 kg	3.19 lb
工具長度	Product Length	275 mm	10.72 inch
空氣消耗	Air Consumption	113 l/min	4 cfm
進氣壓力	Air Inlet Pressure	6.3 kg/cm2	90 psi
進氣接頭	Air Inlet Size	1/4 inch	
風管內徑	Air Hose I.D.	3/8 inch	
噪音值	Sound Pressure	82 dB(A)	
震動值	Vibration Level	5.5 m/s2	

20PCS/CTN 34/35 KG CUFT 1.7'

重載型棘輪扳手
Heavy Duty Ratchet Wrench



JHA-1129

傳動尺寸	Anvil Size	內六角 (Inner Hex) 17mm	
空轉轉速	Free Speed	400 rpm	
工作扭力	Working Torque	10 ft-lb	13 Nm
最大扭力	Max. Torque	40 ft-lb	54 Nm
工具重量	Product Weight	0.66 kg	1.45 lb
工具長度	Product Length	227 mm	8.85 inch
空氣消耗	Air Consumption	841 l/min	3 cfm
進氣壓力	Air Inlet Pressure	6.3 kg/cm2	90 psi
進氣接頭	Air Inlet Size	1/4 inch	
風管內徑	Air Hose I.D.	3/8 inch	
噪音值	Sound Pressure	83 dB(A)	
震動值	Vibration Level	3.5 m/s2	
20PCS/CTN 17/18 KG CUFT 1.1'			

THE BEST CHOICE

Tokat

Maintenance Automotive Tools

Air Die Grinder
Air Angle Grinder
Heavy Duty Air Drill
Air Sander



JHD-1124 / JHD-1127

Brand new Die Grinder , Two front bearing designed to withstand the Heavy-Duty , Housing injection coated with soft material to increase grasps the feeling.

JHD-1125 / JHD-1154 / JHD-1127 / JHD-1128

Brand new Angle Die Grinder (Angle Grinder) , Industrial angle head design to enhance the life of 2.5 times , Housing injection coated with soft material to increase grasps the feeling.

JHD-1145

Brand new Cut Off Tool , The new design to enhance tool life.

JHE-1144 / JHE-1169 / JHE-1170

Brand new Straight Heavy Duty Drill , Two gear design can improve output and stability.

JHD-1158

Brand new Tire Buffer (Quick-change adapter design) , Two gear design can improve output and stability.

1/4" 高速氣鑽
1/4" High Speed Air Drill



汽缸馬力	Cylinder Power	0.3 hp	223.7 w
夾頭能力	Chuck Capacity	6 mm	1/4 inch
空轉轉速	Free Speed	25,000 rpm	
工具重量	Product Weight	0.48kg	1.05 lb
工具長度	Product Length	160 mm	6.29 inch
空氣消耗	Air Consumption	84 l/min	3 cfm
進氣壓力	Air Inlet Pressure	6.3 kg/cm2	90 psi
進氣接頭	Air Inlet Size	1/4 inch	
風管內徑	Air Hose I.D.	3/8 inch	
噪音值	Sound Pressure	82.5 dB(A)	
震動值	Vibration Level	<2.5 m/s2	

20PCS/CTN 13/14 KG CUFT 1.1'

氣動刻模機
Air Die Grinder



汽缸馬力	Cylinder Power	0.3 hp	223.7 w
夾頭能力	Collect Capacity	6 mm	1/4 inch
空轉轉速	Free Speed	25,000 rpm	
工具重量	Product Weight	0.39 kg	0.85 lb
工具長度	Product Length	145 mm	5.66 inch
空氣消耗	Air Consumption	84 l/min	3 cfm
進氣壓力	Air Inlet Pressure	6.3 kg/cm2	90 psi
進氣接頭	Air Inlet Size	1/4 inch	
風管內徑	Air Hose I.D.	3/8 inch	
噪音值	Sound Pressure	82.5 dB(A)	
震動值	Vibration Level	<2.5 m/s2	

20PCS/CTN 13/14 KG CUFT 1.1'



氣動刻模機
Air Die Grinder



汽缸馬力	Cylinder Power	0.3 hp	223.7 w
夾頭能力	Collect Capacity	6 mm	1/4 inch
空轉轉速	Free Speed	24,000 rpm	
工具重量	Product Weight	0.56 kg	1.23 lb
工具長度	Product Length	217 mm	8.54 inch
空氣消耗	Air Consumption	84 l/min	3 cfm
進氣壓力	Air Inlet Pressure	6.3 kg/cm2	90 psi
進氣接頭	Air Inlet Size	1/4 inch	
風管內徑	Air Hose I.D.	3/8 inch	
噪音值	Sound Pressure	80.5 dB(A)	
震動值	Vibration Level	<2.5 m/s2	

20PCS/CTN 16.2/17.2 KG CUFT 1.1'

JHD-1070M 加長 76 mm
Extended 3"

氣動刻模機
Air Die Grinder



JHD-1070L 加長 127 mm
Extended 5"

汽缸馬力	Cylinder Power	0.3 hp	223.7 w
夾頭能力	Collect Capacity	6 mm	1/4 inch
空轉轉速	Free Speed	23,000 rpm	
工具重量	Product Weight	0.66 kg	1.45 lb
工具長度	Product Length	268 mm	10.55 inch
空氣消耗	Air Consumption	84 l/min	3 cfm
進氣壓力	Air Inlet Pressure	6.3 kg/cm2	90 psi
進氣接頭	Air Inlet Size	1/4 inch	
風管內徑	Air Hose I.D.	3/8 inch	
噪音值	Sound Pressure	80.5 dB(A)	
震動值	Vibration Level	<2.5 m/s2	

20PCS/CTN 18.6/19.6 KG CUFT 1.7'

90度氣動刻模機
Air Angle Die Grinder



JHD-1073

汽缸馬力	Cylinder Power	0.3 hp	223.7 w
夾頭能力	Collect Capacity	6 mm	1/4 inch
空轉轉速	Free Speed	20,000 rpm	
工具重量	Product Weight	0.5 kg	1.1 lb
工具長度	Product Length	150 mm	5.9 inch
空氣消耗	Air Consumption	84 l/min	3 cfm
進氣壓力	Air Inlet Pressure	6.3 kg/cm2	90 psi
進氣接頭	Air Inlet Size	1/4 inch	
風管內徑	Air Hose I.D.	3/8 inch	
噪音值	Sound Pressure	80.5 dB(A)	
震動值	Vibration Level	5.9 m/s2	

20PCS/CTN 15/16 KG CUFT 1.1'

1/4"重載型高速氣鑽
1/4" Heavy Duty High Speed Drill



JHE-1155

汽缸馬力	Cylinder Power	0.3 hp	223.7 w
夾頭能力	Chuck Capacity	6 mm	1/4 inch
空轉轉速	Free Speed	25,000 rpm	
工具重量	Product Weight	0.53kg	1.16 lb
工具長度	Product Length	186 mm	7.25 inch
空氣消耗	Air Consumption	84 l/min	3 cfm
進氣壓力	Air Inlet Pressure	6.3 kg/cm2	90 psi
進氣接頭	Air Inlet Size	1/4 inch	
風管內徑	Air Hose I.D.	3/8 inch	
噪音值	Sound Pressure	81.5 dB(A)	
震動值	Vibration Level	0.5 m/s2	

20PCS/CTN 15.6/16.6 KG CUFT 1.1'

重載型氣動刻模機
Heavy Duty Die Grinder



JHD-1124



汽缸馬力	Cylinder Power	0.3 hp	223.7 w
夾頭能力	Collect Capacity	6 mm	1/4 inch
空轉轉速	Free Speed	25,000 rpm	
工具重量	Product Weight	0.45 kg	0.99 lb
工具長度	Product Length	158 mm	6.16 inch
空氣消耗	Air Consumption	84 l/min	3 cfm
進氣壓力	Air Inlet Pressure	6.3 kg/cm2	90 psi
進氣接頭	Air Inlet Size	1/4 inch	
風管內徑	Air Hose I.D.	3/8 inch	
噪音值	Sound Pressure	81.5 dB(A)	
震動值	Vibration Level	0.5 m/s2	

20PCS/CTN 14/15 KG CUFT 1.1'

重載型氣動刻模機
Heavy Duty Die Grinder



JHD-1150

加長 127 mm
Extended5"

汽缸馬力	Cylinder Power	0.3 hp	223.7 w
夾頭能力	Collect Capacity	6 mm	1/4 inch
空轉轉速	Free Speed	22,000 rpm	
工具重量	Product Weight	0.74 kg	1.63 lb
工具長度	Product Length	288 mm	11.23 inch
空氣消耗	Air Consumption	84 l/min	3 cfm
進氣壓力	Air Inlet Pressure	6.3 kg/cm2	90 psi
進氣接頭	Air Inlet Size	1/4 inch	
風管內徑	Air Hose I.D.	3/8 inch	
噪音值	Sound Pressure	81.5 dB(A)	
震動值	Vibration Level	0.5 m/s2	

20PCS/CTN 19.6/20.6 KG CUFT 1.7'

重載型90度氣動刻模機
Heavy Duty Angle Die Grinder



JHD-1125



汽缸馬力	Cylinder Power	0.3 hp	223.7 w
夾頭能力	Collect Capacity	6 mm	1/4 inch
空轉轉速	Free Speed	16,000 rpm	
工具重量	Product Weight	0.53 kg	1.16 lb
工具長度	Product Length	168 mm	6.55 inch
空氣消耗	Air Consumption	84 l/min	3 cfm
進氣壓力	Air Inlet Pressure	6.3 kg/cm2	90 psi
進氣接頭	Air Inlet Size	1/4 inch	
風管內徑	Air Hose I.D.	3/8 inch	
噪音值	Sound Pressure	81.5 dB(A)	
震動值	Vibration Level	4.5 m/s2	

20PCS/CTN 15.6/16.6 KG CUFT 1.1'

重載型氣動角磨機
Heavy Duty Angle Grinder



JHD-1154

汽缸馬力	Cylinder Power	0.3 hp	223.7 w
砂輪尺寸	Wheel Size	60 mm	2.5inch
主軸螺紋	Spindle Thread	3/8" - UNF	
空轉轉速	Free Speed	16,000 rpm	
工具重量	Product Weight	0.59 kg	1.29 lb
工具長度	Product Length	168 mm	6.55 inch
空氣消耗	Air Consumption	84 l/min	3 cfm
進氣壓力	Air Inlet Pressure	6.3 kg/cm2	90 psi
進氣接頭	Air Inlet Size	1/4 inch	
風管內徑	Air Hose I.D.	3/8 inch	
噪音值	Sound Pressure	81.5 dB(A)	
震動值	Vibration Level	4.5 m/s2	
20PCS/CTN 17.3/18.3 KG CUFT 1.1'			

3/8"重載型氣鑽
3/8" Heavy Duty Air Drill



JHE-1170



汽缸馬力	Cylinder Power	0.5 hp	372 w
夾頭能力	Chuck Capacity	10 mm	3/8 inch
空轉轉速	Free Speed	2,500 rpm	
工具重量	Product Weight	0.85kg	1.87 lb
工具長度	Product Length	219 mm	8.54 inch
空氣消耗	Air Consumption	99 l/min	3.5 cfm
進氣壓力	Air Inlet Pressure	6.3 kg/cm2	90 psi
進氣接頭	Air Inlet Size	1/4 inch	
風管內徑	Air Hose I.D.	3/8 inch	
噪音值	Sound Pressure	82 dB(A))	
震動值	Vibration Level	<2.5 m/s2	
20PCS/CTN 23.9/24.9 KG CUFT 1.1'			

3/8"重載型氣鑽
3/8" Heavy Duty Air DrillII



JHE-1144

汽缸馬力	Cylinder Power	0.5 hp	372 w
夾頭能力	Chuck Capacity	10 mm	3/8 inch
空轉轉速	Free Speed	3,600 rpm	
工具重量	Product Weight	0.85kg	1.87 lb
工具長度	Product Length	219 mm	8.54 inch
空氣消耗	Air Consumption	99 l/min	3.5 cfm
進氣壓力	Air Inlet Pressure	6.3 kg/cm2	90 psi
進氣接頭	Air Inlet Size	1/4 inch	
風管內徑	Air Hose I.D.	3/8 inch	
噪音值	Sound Pressure	82 dB(A)	
震動值	Vibration Level	<2.5 m/s2	
20PCS/CTN 23.9/24.9 KG CUFT 1.1'			

3/8" 重載型氣鑽
3/8" Heavy Duty Air Drill



汽缸馬力	Cylinder Power	0.5 hp	372 w
夾頭能力	Chuck Capacity	10 mm	3/8 inch
空轉轉速	Free Speed	5,000 rpm	
工具重量	Product Weight	0.85kg	1.87 lb
工具長度	Product Length	219 mm	8.54inch
空氣消耗	Air Consumption	991/min	3.5 cfm
進氣壓力	Air Inlet Pressure	6.3 kg/cm2	90 psi
進氣接頭	Air Inlet Size	1/4 inch	
風管內徑	Air Hose I.D.	3/8 inch	
噪音值	Sound Pressure	82dB(A)	
震動值	Vibration Level	<2.5 m/s2	

20PCS/CTN 23.9/24.9 KG CUFT 1.1'

3/8" 重載型高速氣鑽
3/8" Heavy Duty High Speed Drill



汽缸馬力	Cylinder Power	0.5 hp	372 w
夾頭能力	Chuck Capacity	10 mm	3/8 inch
空轉轉速	Free Speed	20,000 rpm	
工具重量	Product Weight	0.7kg	1.54 lb
工具長度	Product Length	210 mm	8.19 inch
空氣消耗	Air Consumption	99 l/min	3.5 cfm
進氣壓力	Air Inlet Pressure	6.3 kg/cm2	90 psi
進氣接頭	Air Inlet Size	1/4 inch	
風管內徑	Air Hose I.D.	3/8 inch	
噪音值	Sound Pressure	80 dB(A)	
震動值	Vibration Level	0.5 m/s2	

20PCS/CTN 19.7/20.7 KG CUFT 1.1'

重載型氣動刻模機
Heavy Duty Die Grinder



汽缸馬力	Cylinder Power	0.5 hp	372.9 w
夾頭能力	Collect Capacity	6 mm	1/4 inch
空轉轉速	Free Speed	20,000 rpm	
工具重量	Product Weight	0.62 kg	1.36 lb
工具長度	Product Length	188 mm	7.33 inch
空氣消耗	Air Consumption	99 l/min	3.5 cfm
進氣壓力	Air Inlet Pressure	6.3 kg/cm2	90 psi
進氣接頭	Air Inlet Size	1/4 inch	
風管內徑	Air Hose I.D.	3/8 inch	
噪音值	Sound Pressure	80 dB(A)	
震動值	Vibration Level	0.5 m/s2	

20PCS/CTN 17.4/18.4 KG CUFT 1.1'



重載型氣動刻模機
Heavy Duty Die Grinder



JHD-1156 加長 127 mm
Extended 5"

汽缸馬力	Cylinder Power	0.5 hp	372.9 w
夾頭能力	Collect Capacity	6 mm	1/4 inch
空轉轉速	Free Speed	18,000 rpm	
工具重量	Product Weight	0.93 kg	2.05 lb
工具長度	Product Length	303 mm	11.81 inch
空氣消耗	Air Consumption	99 l/min	3.5 cfm
進氣壓力	Air Inlet Pressure	6.3 kg/cm2	90 psi
進氣接頭	Air Inlet Size	1/4 inch	
風管內徑	Air Hose I.D.	3/8 inch	
噪音值	Sound Pressure	80 dB(A)	
震動值	Vibration Level	0.5 m/s2	

20PCS/CTN 18.6/19.6 KG CUFT 1.7'

重載型氣動刻模機
Heavy Duty Die Grinder



JHD-1156L 加長 254mm
Extended 10"

汽缸馬力	Cylinder Power	0.5 hp	372.9 w
夾頭能力	Collect Capacity	6 mm	1/4 inch
空轉轉速	Free Speed	18,000 rpm	
工具重量	Product Weight	1.17 kg	2.58 lb
工具長度	Product Length	430 mm	16.77 inch
空氣消耗	Air Consumption	99 l/min	3.5 cfm
進氣壓力	Air Inlet Pressure	6.3 kg/cm2	90 psi
進氣接頭	Air Inlet Size	1/4 inch	
風管內徑	Air Hose I.D.	3/8 inch	
噪音值	Sound Pressure	80 dB(A)	
震動值	Vibration Level	0.5 m/s2	

6PCS/CTN 9.2/10.2 KG CUFT 0.75'

重載型90度氣動刻模機
Heavy Duty Angle Die Grinder



JHD-1157

汽缸馬力	Cylinder Power	0.5 hp	372.9 w
夾頭能力	Collect Capacity	6 mm	1/4 inch
空轉轉速	Free Speed	14,000 rpm	
工具重量	Product Weight	0.73 kg	1.61 lb
工具長度	Product Length	185 mm	7.21 inch
空氣消耗	Air Consumption	99 l/min	3.5 cfm
進氣壓力	Air Inlet Pressure	6.3 kg/cm2	90 psi
進氣接頭	Air Inlet Size	1/4 inch	
風管內徑	Air Hose I.D.	3/8 inch	
噪音值	Sound Pressure	80 dB(A)	
震動值	Vibration Level	5 m/s2	

20PCS/CTN 19.6/20.6 KG CUFT 1.1'

重載型氣動角磨機
Heavy Duty Angle Grinder



JHD-1128

汽缸馬力	Cylinder Power	0.5 hp	372.9 w
砂輪尺寸	Wheel Size	75 mm	3 inch
主軸螺紋	Spindle Thread	3/8" - 24UNF	
空轉轉速	Free Speed	14,000 rpm	
工具重量	Product Weight	0.8 kg	1.76 lb
工具長度	Product Length	185 mm	7.21 inch
空氣消耗	Air Consumption	84 l/min	3 cfm
進氣壓力	Air Inlet Pressure	6.3 kg/cm2	90 psi
進氣接頭	Air Inlet Size	1/4 inch	
風管內徑	Air Hose I.D.	3/8 inch	
噪音值	Sound Pressure	80 dB(A)	
震動值	Vibration Level	5 m/s2	

20PCS/CTN 21.5/22.5 KG CUFT 1.1'

重載型氣動切割機
Heavy Duty Cut Off Tool



JHD-1146

汽缸馬力	Cylinder Power	0.5 hp	372.9 w
砂輪尺寸	Wheel Size	75 mm	3 inch
主軸螺紋	Spindle Thread	3/8" -24UNF	
空轉轉速	Free Speed	20,000 rpm	
工具重量	Product Weight	0.77 kg	1.69 lb
工具長度	Product Length	193 mm	7.52 inch
空氣消耗	Air Consumption	99 l/min	3.5 cfm
進氣壓力	Air Inlet Pressure	6.3 kg/cm2	90 psi
進氣接頭	Air Inlet Size	1/4 inch	
風管內徑	Air Hose I.D.	3/8 inch	
噪音值	Sound Pressure	80 dB(A)	
震動值	Vibration Level	0.5 m/s2	

重載型氣動切割機
Heavy Duty Cut Off Tool



JHD-1145

汽缸馬力	Cylinder Power	0.5 hp	372.9 w
砂輪尺寸	Wheel Size	100 mm	4 inch
主軸螺紋	Spindle Thread	3/8" -24UNF	
空轉轉速	Free Speed	13,000 rpm	
工具重量	Product Weight	1.33 kg	2.92 lb
工具長度	Product Length	168 mm	13.41 inch
空氣消耗	Air Consumption	99 l/min	3.5 cfm
進氣壓力	Air Inlet Pressure	6.3 kg/cm2	90 psi
進氣接頭	Air Inlet Size	1/4 inch	
風管內徑	Air Hose I.D.	3/8 inch	
噪音值	Sound Pressure	80 dB(A)	
震動值	Vibration Level	5 m/s2	

重載型氣動除膠機
Heavy Duty Air Smart Eraser



JHD-1143

汽缸馬力	Cylinder Power	0.5 hp	372.9 w
砂輪尺寸	Wheel Size	88 mm	3.5 inch
主軸螺紋	Spindle Thread	5/16" -24UNF	
空轉轉速	Free Speed	3,600 rpm	
工具重量	Product Weight	1.1 kg	2.42 lb
工具長度	Product Length	228 mm	8.89 inch
空氣消耗	Air Consumption	99 l/min	3.5 cfm
進氣壓力	Air Inlet Pressure	6.3 kg/cm2	90 psi
進氣接頭	Air Inlet Size	1/4 inch	
風管內徑	Air Hose I.D.	3/8 inch	
噪音值	Sound Pressure	80 dB(A)	
震動值	Vibration Level	<2.5 m/s2	

重載型氣動輪胎研磨機
Heavy Duty Air Tire Buffer



JHD-1158

汽缸馬力	Cylinder Power	0.5 hp	372.9 w
砂輪尺寸	Wheel Size		
主軸螺紋	Spindle Thread	3/8" -24UNF	
空轉轉速	Free Speed	2,500rpm	
工具重量	Product Weight	1.2 kg	2.64 lb
工具長度	Product Length	172 mm	6.7 inch
空氣消耗	Air Consumption	99 l/min	3.5 cfm
進氣壓力	Air Inlet Pressure	6.3 kg/cm2	90 psi
進氣接頭	Air Inlet Size	1/4 inch	
風管內徑	Air Hose I.D.	3/8 inch	
噪音值	Sound Pressure	80 dB(A)	
震動值	Vibration Level	<2.5 m/s2	

迷你槍型刻模機
Mini Pistol Die Grinder



JHD-1090

汽缸馬力	Cylinder Power	0.35 hp	260.9 w
夾頭能力	Collect Capacity	6 mm	1/4 inch
空轉轉速	Free Speed	17,000 rpm	
工具重量	Product Weight	0.5 kg	1.1 lb
工具長度	Product Length	120 mm	4.68 inch
空氣消耗	Air Consumption	84 l/min	3 cfm
進氣壓力	Air Inlet Pressure	6.3 kg/cm2	90 psi
進氣接頭	Air Inlet Size	1/4 inch	
風管內徑	Air Hose I.D.	3/8 inch	
噪音值	Sound Pressure	83 dB(A)	
震動值	Vibration Level	<2.5 m/s2	

20PCS/CTN 14/15 KG CUFT 1.2'

迷你槍型刻模機組
Mini Pistol Die Grinder Kit



JHK-1090

配件明細	Accessories	1 pc JHD-1090
		1 pc 3mm(1/8") Collet
		5 pcs 3mm(1/8") Grinding Stones
		5 pcs 6mm(1/4") Grinding Stones
		2 pcs Spanner Wrench
		1 pc 1/4" Air Inlet
		1 pc Mini Oiler

迷你槍型盤式磨光機
Mini Pistol Disc Sander



Handle Exhaust

JHD-1060

磨盤尺寸	Pad Size	75 mm	3 inch
主軸螺紋	Spindle Thread	1/4-20UNC	
軌道直徑	Orbit Diameter	N/A	
空轉轉速	Free Speed	17,000 rpm	
工具重量	Product Weight	0.45 kg	0.99 lb
工具長度	Product Length	109 mm	4.29inch
空氣消耗	Air Consumption	84 l/min	3 cfm
進氣壓力	Air Inlet Pressure	6.3 kg/cm2	90 psi
進氣接頭	Air Inlet Size	1/4 inch	
風管內徑	Air Hose I.D.	3/8 inch	
噪音值	Sound Pressure	83 dB(A)	
震動值	Vibration Level	<2.5 m/s2	

20PCS/CTN 13.8/14.8 KG CUFT 1.2'

迷你槍型氣動拋光機
Mini Pistol Air Polisher



JHK-1060

配件明細	Accessories	1 pc JHD-1060
		1 pc 2"Rubber Pad
		1 pc 3"Rubber Pad
		1 pc 2"Surface Prep Disc(Coarse)
		1 pc 2"Surface Prep Disc(Medium)
		1 pc 3"Surface Prep Disc (Coarse)
		1 pc 3"Surface Prep Disc(Medium)
		1 pc 2"#80 Sanding Disc Dia.
		1 pc 3"#80 Sanding Disc Dia.
		1 pc SpannerWrench
		1 pc 1/4"Air Inlet
		1 pc Mini Oiler

迷你槍型軌道式磨光機
Mini Pistol Random Orbital Sander



JHF-1061

磨盤尺寸	Pad Size	75 mm	3 inch
主軸螺紋	Spindle Thread	5/16" - 24UNF	
軌道直徑	Orbit Diameter	3 mm	0.12inch
空轉轉速	Free Speed	17,000 rpm	
工具重量	Product Weight	0.5 kg	1.1 lb
工具長度	Product Length	118 mm	4.64 inch
空氣消耗	Air Consumption	84 l/min	3 cfm
進氣壓力	Air Inlet Pressure	6.3 kg/cm2	90 psi
進氣接頭	Air Inlet Size	1/4 inch	
風管內徑	Air Hose I.D.	3/8 inch	
噪音值	Sound Pressure	83 dB(A)	
震動值	Vibration Level	<2.5 m/s2	

20PCS/CTN 14.4/15.5 KG CUFT 1.2'

迷你槍型軌道式磨光機組
Mini Pistol Random Orbital Sander Kit



JHK-1061



配件明細	Accessories	1 pc JHF-1061
		1 pc 2" Disc Pad
		1 pc 3" Disc Pad
		10 pcs 2" Sanding paper #180 Grit
		10 pcs 2" Sanding paper #220 Grit
		10 pcs 2" Sanding paper #320 Grit
		10 pcs 3" Sanding paper #180 Grit
		10 pcs 3" Sanding paper #220 Grit
		10 pcs 3" Sanding paper #320 Grit
		1 pc Spanner Wrench
		1 pc 1/4" Air Inlet

迷你槍型氣動拋光機
Mini Pistol Air Polisher



JHD-1062

磨盤尺寸	Pad Size	75 mm	3 inch
主軸螺紋	Spindle Thread	5/16" - 24UNF	
軌道直徑	Orbit Diameter	N/A	
空轉轉速	Free Speed	5,500 rpm	
工具重量	Product Weight	0.6 kg	1.32 lb
工具長度	Product Length	130 mm	5.11 inch
空氣消耗	Air Consumption	84 l/min	3 cfm
進氣壓力	Air Inlet Pressure	6.3 kg/cm2	90 psi
進氣接頭	Air Inlet Size	1/4 inch	
風管內徑	Air Hose I.D.	3/8 inch	
噪音值	Sound Pressure	83 dB(A)	
震動值	Vibration Level	<2.5 m/s2	

20PCS/CTN 15/16 KG CUFT 1.2'

迷你槍型氣動拋光機組
Mini Pistol Air Polisher Kit



JHK-1062

配件明細	Accessories	1 pc JHD-1062
		1 pc 3" Disc Pad
		1 pc 3" Lamb Wool Pad
		1 pc 3" Hard Polish Foam Pad(Yellow)
		1 pc 3" Soft Polish Foam Pad(White)
		1 pc Spanner Wrench
		1 pc 1/4" Air Inlet

1/4"迷你塑鋼正逆轉氣鑽
1/4" Mini Composite Reversible Drill



Handle Exhaust



JHE-1058

	Cylinder Power	0.38 hp	283 w
	Chuck Capacity	6 mm	1/4 inch
	Free Speed	1,900 rpm	
工具重量	Product Weight	0.8kg	1.76 lb
工具長度	Product Length	174 mm	6.78 inch
空氣消耗	Air Consumption	84 l/min	3 cfm
進氣壓力	Air Inlet Pressure	6.3 kg/cm2	90 psi
進氣接頭	Air Inlet Size	1/4 inch	
風管內徑	Air Hose I.D.	3/8 inch	
噪音值	Sound Pressure	83 dB(A)	
震動值	Vibration Level	<2.5 m/s2	

20PCS/CTN 19.1/20.1 KG CUFT 1.2'

1/4"迷你塑鋼正逆轉氣鑽組
1/4" Mini Composite Reversible Drill Kit



JHK-1058

配件明細	Accessories	1 pc JHE-1058
		1 pc 3.5 mm Drill
		1 pc 4.0 mm Drill
		1 pc 4.5 mm Drill
		1 pc 5.0 mm Drill
		1 pc Key Wrench
		1 pc 1/4" Air Inlet
		1 pc Mini Oiler

3/8"鋁合金90度正逆轉氣鑽
3/8" Aluminum Angle Reversible Air Drill



JHE-1054

汽缸馬力	Cylinder Power	0.5 hp	372 w
夾頭能力	Chuck Capacity	10 mm	3/8 inch
空轉轉速	Free Speed	1,200 rpm	
工具重量	Product Weight	1.2kg	2.64 lb
工具長度	Product Length	211 mm	8.23 inch
空氣消耗	Air Consumption	99 l/min	3.5 cfm
進氣壓力	Air Inlet Pressure	6.3 kg/cm2	90 psi
進氣接頭	Air Inlet Size	1/4 inch	
風管內徑	Air Hose I.D.	3/8 inch	
噪音值	Sound Pressure	83 dB(A)	
震動值	Vibration Level	5 m/s2	

3/8"鋁合金正逆轉氣鑽
3/8" Aluminum Reversible Air Drill



JHE-1045

汽缸馬力	Cylinder Power	0.5 hp	372 w
夾頭能力	Chuck Capacity	10 mm	3/8 inch
空轉轉速	Free Speed	2,000 rpm	
工具重量	Product Weight	1.1kg	2.42 lb
工具長度	Product Length	150 mm	5.9 inch
空氣消耗	Air Consumption	99 l/min	3.5 cfm
進氣壓力	Air Inlet Pressure	6.3 kg/cm2	90 psi
進氣接頭	Air Inlet Size	1/4 inch	
風管內徑	Air Hose I.D.	3/8 inch	
噪音值	Sound Pressure	85 dB(A)	
震動值	Vibration Level	<2.5 m/s2	

10PCS/CTN 14.3/15.3 KG CUFT 1.6'

1/2"鋁合金正逆轉氣鑽
1/2" Aluminum Reversible Air Drill



JHE-1044

汽缸馬力	Cylinder Power	0.5 hp	372 w
夾頭能力	Chuck Capacity	13 mm	1/2 inch
空轉轉速	Free Speed	900 rpm	
工具重量	Product Weight	1.4kg	3.08 lb
工具長度	Product Length	172 mm	6.7 inch
空氣消耗	Air Consumption	99 l/min	3.5 cfm
進氣壓力	Air Inlet Pressure	6.3 kg/cm2	90 psi
進氣接頭	Air Inlet Size	1/4 inch	
風管內徑	Air Hose I.D.	3/8 inch	
噪音值	Sound Pressure	85 dB(A)	
震動值	Vibration Level	<2.5 m/s2	

10PCS/CTN 20.6/21.6 KG CUFT 1.6'

重載型氣動角磨機
Heavy Duty Angle Grinder



JHD-1029

汽缸馬力	Cylinder Power	0.6 hp	447 w
砂輪尺寸	Wheel Size	100 mm	4 inch
主軸螺紋	Spindle Thread		
空轉轉速	Free Speed	10,500 rpm	
工具重量	Product Weight	1.3 kg	2.86 lb
工具長度	Product Length	200 mm	7.8 inch
空氣消耗	Air Consumption	127 l/min	4.5 cfm
進氣壓力	Air Inlet Pressure	6.3 kg/cm2	90 psi
進氣接頭	Air Inlet Size	1/4 inch	
風管內徑	Air Hose I.D.	3/8 inch	
噪音值	Sound Pressure	84 dB(A)	
震動值	Vibration Level	6 m/s2	

10PCS/CTN 22/22 KG CUFT 1.1'

重載型氣動角磨機 / 旋轉開關
Heavy Duty Angle Grinder / Rotary switch



JHD-1029S

汽缸馬力	Cylinder Power	0.6 hp	447 w
砂輪尺寸	Wheel Size	100 mm	4 inch
主軸螺紋	Spindle Thread		
空轉轉速	Free Speed	10,500 rpm	
工具重量	Product Weight	1.2 kg	2.6 lb
工具長度	Product Length	185 mm	7.21 inch
空氣消耗	Air Consumption	127 l/min	4.5 cfm
進氣壓力	Air Inlet Pressure	6.3 kg/cm2	90 psi
進氣接頭	Air Inlet Size	1/4 inch	
風管內徑	Air Hose I.D.	3/8 inch	
噪音值	Sound Pressure	84 dB(A)	
震動值	Vibration Level	6 m/s2	

10PCS/CTN 20/21 KG CUFT 1.1'

重載型氣動角磨機
Heavy Duty Angle Grinder



JHD-1030

汽缸馬力	Cylinder Power	0.8 hp	596 w
砂輪尺寸	Wheel Size	125 mm	5 inch
主軸螺紋	Spindle Thread		
空轉轉速	Free Speed	9,500 rpm	
工具重量	Product Weight	1.9 kg	4.18 lb
工具長度	Product Length	245 mm	9.55 inch
空氣消耗	Air Consumption	169 l/min	6 cfm
進氣壓力	Air Inlet Pressure	6.3 kg/cm2	90 psi
進氣接頭	Air Inlet Size	1/4 inch	
風管內徑	Air Hose I.D.	3/8 inch	
噪音值	Sound Pressure	82 dB(A)	
震動值	Vibration Level	6.5 m/s2	

10PCS/CTN 22/23 KG CUFT 1.35'

重載型氣動角磨機 / 旋轉開關
Heavy Duty Angle Grinder / Rotary switch



JHD-1030S

汽缸馬力	Cylinder Power	0.8 hp	596 w
砂輪尺寸	Wheel Size	125 mm	5 inch
主軸螺紋	Spindle Thread		
空轉轉速	Free Speed	9,500 rpm	
工具重量	Product Weight	1.8 kg	3.9 lb
工具長度	Product Length	230 mm	9.05 inch
空氣消耗	Air Consumption	169 l/min	6 cfm
進氣壓力	Air Inlet Pressure	6.3 kg/cm2	90 psi
進氣接頭	Air Inlet Size	1/4 inch	
風管內徑	Air Hose I.D.	3/8 inch	
噪音值	Sound Pressure	82 dB(A)	
震動值	Vibration Level	6.5 m/s2	

10PCS/CTN 21/22 KG CUFT 1.35'

重載型氣動角磨機
Heavy Duty Angle Grinder / Rotary switch



JHD-1025

汽缸馬力	Cylinder Power	1 hp	745 w
砂輪尺寸	Wheel Size	180 mm	7 inch
主軸螺紋	Spindle Thread		
空轉轉速	Free Speed	9,500 rpm	
工具重量	Product Weight	3.5 kg	7.7 lb
工具長度	Product Length	290 mm	11.31 inch
空氣消耗	Air Consumption	226 l/min	8 cfm
進氣壓力	Air Inlet Pressure	6.3 kg/cm2	90 psi
進氣接頭	Air Inlet Size	1/4 inch	
風管內徑	Air Hose I.D.	3/8 inch	
噪音值	Sound Pressure	80 dB(A)	
震動值	Vibration Level	7.0 m/s2	

6PCS/CTN 24.2/25.2 KG CUFT 1.8'

重載型氣動角磨機 / 旋轉開關
Heavy Duty Angle Grinder / Rotary switch



JHD-1025S

汽缸馬力	Cylinder Power	1 hp	745 w
砂輪尺寸	Wheel Size	180 mm	7 inch
主軸螺紋	Spindle Thread		
空轉轉速	Free Speed	9,500 rpm	
工具重量	Product Weight	3.3 kg	7.2 lb
工具長度	Product Length	270 mm	10.62 inch
空氣消耗	Air Consumption	226 l/min	8 cfm
進氣壓力	Air Inlet Pressure	6.3 kg/cm2	90 psi
進氣接頭	Air Inlet Size	1/4 inch	
風管內徑	Air Hose I.D.	3/8 inch	
噪音值	Sound Pressure	80 dB(A)	
震動值	Vibration Level	7.0 m/s2	

6PCS/CTN 24.2/25.2 KG CUFT 1.8'

軌道式氣動磨光機
Random Orbital Sander



JHF-1048

磨盤尺寸	Pad Size	123 mm	5 inch
主軸螺紋	Spindle Thread	5/16" - 24UNF	
軌道直徑	Orbit Diameter	5 mm	5/16 inch
空轉轉速	Free Speed	10,000 rpm	
工具重量	Product Weight	0.92 kg	2.02 lb
工具長度	Product Length	155 mm	6.10 inch
空氣消耗	Air Consumption	337 l/min	11.9 cfm
進氣壓力	Air Inlet Pressure	6.3 kg/cm2	90 psi
進氣接頭	Air Inlet Size	1/4 inch	
風管內徑	Air Hose I.D.	3/8 inch	
噪音值	Sound Pressure	82 dB(A)	
震動值	Vibration Level	<2.5 m/s2	

12PCS/CTN 19/20 KG CUFT 2.2'

軌道式氣動磨光機 / 中央集塵
Random Orbital Sander / Central Vacuum



JHF-1049

磨盤尺寸	Pad Size	123 mm	5 inch
主軸螺紋	Spindle Thread	5/16" - 24UNF	
軌道直徑	Orbit Diameter	5 mm	5/16 inch
空轉轉速	Free Speed	10,000 rpm	
工具重量	Product Weight	0.94 kg	2.07 lb
工具長度	Product Length	175 mm	6.88 inch
空氣消耗	Air Consumption	337 l/min	11.9 cfm
進氣壓力	Air Inlet Pressure	6.3 kg/cm2	90 psi
進氣接頭	Air Inlet Size	1/4 inch	
風管內徑	Air Hose I.D.	3/8 inch	
噪音值	Sound Pressure	82 dB(A)	
震動值	Vibration Level	<2.5 m/s2	

12PCS/CTN 19.5/20.5 KG CUFT 2.2'

軌道式氣動磨光機 / 自助集塵
Random Orbital Sander / Self Vacuum



JHF-1050

磨盤尺寸	Pad Size	123 mm	5 inch
主軸螺紋	Spindle Thread	5/16" - 24UNF	
軌道直徑	Orbit Diameter	5 mm	5/16 inch
空轉轉速	Free Speed	10,000 rpm	
工具重量	Product Weight	0.92 kg	2.02 lb
工具長度	Product Length	155 mm	6.10 inch
空氣消耗	Air Consumption	337 l/min	11.9 cfm
進氣壓力	Air Inlet Pressure	6.3 kg/cm2	90 psi
進氣接頭	Air Inlet Size	1/4 inch	
風管內徑	Air Hose I.D.	3/8 inch	
噪音值	Sound Pressure	82 dB(A)	
震動值	Vibration Level	<2.5 m/s2	

12PCS/CTN 20/21 KG CUFT 2.2'

THE BEST CHOICE



Professional production Screw Driver

Air Screw Driver

Composite Air Screw Driver



shallow aroove bits slot



Deep groove bits slot



JHC-1040

Deep groove bits slot

JHC-1107

Self tapping screws

JHC-1074

Deep groove bits slot

鋁合金氣動起子
Aluminum Air Screw Driver



JHC-1040

衝擊結構	Impact Type	Two Hammer	
螺絲能力	Screw Capacity	5 mm	
空轉轉速	Free Speed	12,000 rpm	
工作扭力	Working Torque	30 ft-lb	40 Nm
最大扭力	Max. Torque	50 ft-lb	68 Nm
工具重量	Product Weight	0.7 kg	1.5 lb
工具長度	Product Length	196 mm	7.64 inch
空氣消耗	Air Consumption	84 l/min	3 cfm
進氣壓力	Air Inlet Pressure	6.3 kg/cm2	90 psi
進氣接頭	Air Inlet Size	1/4 inch	
風管內徑	Air Hose I.D.	3/8 inch	
噪音值	Sound Pressure	85 dB(A)	
震動值	Vibration Level	<2.5 m/s2	

20PCS/CTN 16/17 KG CUFT 1.2'

迷你直驅式氣動起子
Mini Direct Driver Type Screw Driver



JHC-1107

汽缸馬力	Cylinder Power	0.38 hp	283 w
螺絲能力	Screw Capacity	4 mm	
空轉轉速	Free Speed	1,900 rpm	
工具重量	Product Weight	0.75kg	1.76 lb
工具長度	Product Length	170 mm	6.63 inch
空氣消耗	Air Consumption	84 l/min	3 cfm
進氣壓力	Air Inlet Pressure	6.3 kg/cm2	90 psi
進氣接頭	Air Inlet Size	1/4 inch	
風管內徑	Air Hose I.D.	3/8 inch	
噪音值	Sound Pressure	83 dB(A)	
震動值	Vibration Level	<2.5 m/s2	

20PCS/CTN 18.1/19.1 KG CUFT 1.2'

迷你塑鋼氣動起子
Mini Composite Air Screw Driver



JHC-1074

衝擊結構	Impact Type	Two Hammer	
螺絲能力	Screw Capacity	5 mm	
空轉轉速	Free Speed	13,000 rpm	
工作扭力	Working Torque	30 ft-lb	40 Nm
最大扭力	Max. Torque	50 ft-lb	68 Nm
工具重量	Product Weight	0.7 kg	1.5 lb
工具長度	Product Length	170 mm	6.63 inch
空氣消耗	Air Consumption	84 l/min	3 cfm
進氣壓力	Air Inlet Pressure	6.3 kg/cm2	90 psi
進氣接頭	Air Inlet Size	1/4 inch	
風管內徑	Air Hose I.D.	3/8 inch	
噪音值	Sound Pressure	85 dB(A)	
震動值	Vibration Level	<2.5 m/s2	

20PCS/CTN 16/17 KG CUFT 1.2'

迷你塑鋼氣動起子組
Mini Composite Air Screw Driver Kit



JHK-1074



配件明細	Accessories	1 pc JHC-1074
		1 pc PH2x100mm
		2 pcs PH2x65mm
		2 pcs FD6x50mm
		1 pc 1/4" Air Inlet
		1 pc Mini Oiler

THE BEST CHOICE

Tokat®

Industrial Production TOOLS

Air Die Grinder
Air Angle Grinder
Air Drill
Air Sander



JHD-1101

Brand new 0.5 HP Industry Steel Die Grinder series.

JHD-1083

Full 1 HP cylinder horsepower Industry Steel Die Grinder series.

JHF-1185

Brand new Industry Random Orbital Sander series , Perfect counter weight , Configure the 3 bearings design (one's NSK Bearings).

1/4 " 工業級高速氣鑽
1/4 " Industry High Speed Air Drill



JHE-1066

汽缸馬力	Cylinder Power	0.45 hp	335 w
夾頭能力	Chuck Capacity	6 mm	1/4 inch
空轉轉速	Free Speed	20,000 rpm	
工具重量	Product Weight	0.8kg	1.76 lb
工具長度	Product Length	175 mm	6.88 inch
空氣消耗	Air Consumption	126 l/min	4.5 cfm
進氣壓力	Air Inlet Pressure	6.3 kg/cm2	90 psi
進氣接頭	Air Inlet Size	1/4 inch	
風管內徑	Air Hose I.D.	3/8 inch	
噪音值	Sound Pressure	84.5 dB(A)	
震動值	Vibration Level	<2.5 m/s2	

20PCS/CTN 19/20 KG CUFT 1.1'

工業級刻模機
Industry Die Grinder



JHD-1027

汽缸馬力	Cylinder Power	0.45 hp	335 w
夾頭能力	Chuck Capacity	6 mm	1/4 inch
空轉轉速	Free Speed	20,000 rpm	
工具重量	Product Weight	0.7 kg	1.5 lb
工具長度	Product Length	165 mm	6.49 inch
空氣消耗	Air Consumption	127 l/min	4.5 cfm
進氣壓力	Air Inlet Pressure	6.3 kg/cm2	90 psi
進氣接頭	Air Inlet Size	1/4 inch	
風管內徑	Air Hose I.D.	3/8 inch	
噪音值	Sound Pressure	84.5 dB(A)	
震動值	Vibration Level	<2.5 m/s2	

20PCS/CTN 18/19 KG CUFT 1.1'

工業級刻模機 / 旋轉開關
Industry Die Grinder / Rotary switch



JHD-1027S

汽缸馬力	Cylinder Power	0.45 hp	335 w
夾頭能力	Chuck Capacity	6 mm	1/4 inch
空轉轉速	Free Speed	20,000 rpm	
工具重量	Product Weight	0.7 kg	1.5 lb
工具長度	Product Length	175 mm	6.88 inch
空氣消耗	Air Consumption	127 l/min	4.5 cfm
進氣壓力	Air Inlet Pressure	6.3 kg/cm2	90 psi
進氣接頭	Air Inlet Size	1/4 inch	
風管內徑	Air Hose I.D.	3/8 inch	
噪音值	Sound Pressure	84.5 dB(A)	
震動值	Vibration Level	<2.5 m/s2	

20PCS/CTN 18/19 KG CUFT 1.1'

工業級刻模機
Industry Die Grinder



JHD-1027L 加長 127mm
Extended 5"

汽缸馬力	Cylinder Power	0.45 hp	335 w
夾頭能力	Chuck Capacity	6 mm	1/4 inch
空轉轉速	Free Speed	18,000 rpm	
工具重量	Product Weight	1.1 kg	2.42 lb
工具長度	Product Length	320 mm	12.59 inch
空氣消耗	Air Consumption	127 l/min	4.5 cfm
進氣壓力	Air Inlet Pressure	6.3 kg/cm2	90 psi
進氣接頭	Air Inlet Size	1/4 inch	
風管內徑	Air Hose I.D.	3/8 inch	
噪音值	Sound Pressure	84.5 dB(A)	
震動值	Vibration Level	<2.5 m/s2	

20PCS/CTN 27/28 KG CUFT 1.7'

工業級刻模機 / 旋轉開關
Industry Die Grinder / Rotary switch



JHD-1027SL 加長 127mm
Extended 5"

汽缸馬力	Cylinder Power	0.45 hp	335 w
夾頭能力	Chuck Capacity	6 mm	1/4 inch
空轉轉速	Free Speed	18,000 rpm	
工具重量	Product Weight	1.1 kg	2.42 lb
工具長度	Product Length	330 mm	12.99 inch
空氣消耗	Air Consumption	127 l/min	4.5 cfm
進氣壓力	Air Inlet Pressure	6.3 kg/cm2	90 psi
進氣接頭	Air Inlet Size	1/4 inch	
風管內徑	Air Hose I.D.	3/8 inch	
噪音值	Sound Pressure	84.5 dB(A)	
震動值	Vibration Level	<2.5 m/s2	

20PCS/CTN 27/28 KG CUFT 1.7'

工業級氣動刻模機
Industry Air Die Grinder



JHD-1028

汽缸馬力	Cylinder Power	0.9 hp	671.1 w
夾頭能力	Chuck Capacity	8 mm	3/8 inch
空轉轉速	Free Speed	18,000 rpm	
工具重量	Product Weight	1.2 kg	2.64 lb
工具長度	Product Length	195 mm	7.6 inch
空氣消耗	Air Consumption	255 l/min	9 cfm
進氣壓力	Air Inlet Pressure	6.3 kg/cm2	90 psi
進氣接頭	Air Inlet Size	1/4 inch	
風管內徑	Air Hose I.D.	3/8 inch	
噪音值	Sound Pressure	87.5 dB(A)	
震動值	Vibration Level	<2.5 m/s2	

20PCS/CTN 24/25 KG CUFT 1.1'



工業級氣動刻模機 / 旋轉開關
Industry Air Die Grinder / Rotary switch



JHD-1028S

汽缸馬力	Cylinder Power	0.9 hp	671.1 w
夾頭能力	Chuck Capacity	8 mm	3/8 inch
空轉轉速	Free Speed	18,000 rpm	
工具重量	Product Weight	1.2 kg	2.64 lb
工具長度	Product Length	200 mm	7.8 inch
空氣消耗	Air Consumption	255 l/min	9 cfm
進氣壓力	Air Inlet Pressure	6.3 kg/cm2	90 psi
進氣接頭	Air Inlet Size	1/4 inch	
風管內徑	Air Hose I.D.	3/8 inch	
噪音值	Sound Pressure	87.5 dB(A)	
震動值	Vibration Level	<2.5 m/s2	

20PCS/CTN 24/25 KG CUFT 1.1'

工業級鐵製刻模機
Industry Steel Die Grinder



JHD-1101

汽缸馬力	Cylinder Power	0.5 hp	372.8 w
夾頭能力	Chuck Capacity	6 mm	1/4 inch
空轉轉速	Free Speed	22,000 rpm	
工具重量	Product Weight	0.9 kg	1.98 lb
工具長度	Product Length	169 mm	6.59 inch
空氣消耗	Air Consumption	141 l/min	5 cfm
進氣壓力	Air Inlet Pressure	6.3 kg/cm2	90 psi
進氣接頭	Air Inlet Size	1/4 inch	
風管內徑	Air Hose I.D.	3/8 inch	
噪音值	Sound Pressure	83.5 dB(A)	
震動值	Vibration Level	<2.5 m/s2	

20PCS/CTN 23/24 KG CUFT 1.1'

工業級鐵製刻模機 / 旋轉開關
Industry Steel Die Grinder / Rotary switch



JHD-1101S

汽缸馬力	Cylinder Power	0.5 hp	372.8 w
夾頭能力	Chuck Capacity	6 mm	1/4 inch
空轉轉速	Free Speed	22,000 rpm	
工具重量	Product Weight	0.8 kg	1.76 lb
工具長度	Product Length	180 mm	7.02 inch
空氣消耗	Air Consumption	141 l/min	5 cfm
進氣壓力	Air Inlet Pressure	6.3 kg/cm2	90 psi
進氣接頭	Air Inlet Size	1/4 inch	
風管內徑	Air Hose I.D.	3/8 inch	
噪音值	Sound Pressure	83.5 dB(A)	
震動值	Vibration Level	<2.5 m/s2	

20PCS/CTN 23/24 KG CUFT 1.1'

工業級鐵製刻模機
Industry Steel Die Grinder



360° Adjust Side Exhaust



JHD-1102 加長 127mm
Extended 5"

汽缸馬力	Cylinder Power	0.5 hp	372.8 w
夾頭能力	Chuck Capacity	6 mm	1/4 inch
空轉轉速	Free Speed	20,000 rpm	
工具重量	Product Weight	1.3 kg	2.86 lb
工具長度	Product Length	319 mm	12.44 inch
空氣消耗	Air Consumption	141 l/min	5 cfm
進氣壓力	Air Inlet Pressure	6.3 kg/cm2	90 psi
進氣接頭	Air Inlet Size	1/4 inch	
風管內徑	Air Hose I.D.	3/8 inch	
噪音值	Sound Pressure	83.5 dB(A)	
震動值	Vibration Level	<2.5 m/s2	

20PCS/CTN 31/32 KG CUFT 1.7'

工業級鐵製刻模機 / 旋轉開關
Industry Steel Die Grinder / Rotary switch



360° Adjust Side Exhaust



JHD-1102S 加長 127mm
Extended 5"

汽缸馬力	Cylinder Power	0.5 hp	372.8 w
夾頭能力	Chuck Capacity	6 mm	1/4 inch
空轉轉速	Free Speed	20,000 rpm	
工具重量	Product Weight	1.2 kg	2.64 lb
工具長度	Product Length	330 mm	12.87 inch
空氣消耗	Air Consumption	141 l/min	5 cfm
進氣壓力	Air Inlet Pressure	6.3 kg/cm2	90 psi
進氣接頭	Air Inlet Size	1/4 inch	
風管內徑	Air Hose I.D.	3/8 inch	
噪音值	Sound Pressure	83.5 dB(A)	
震動值	Vibration Level	<2.5 m/s2	

20PCS/CTN 31/32 KG CUFT 1.7'

工業級鐵製刻模機
Industry Steel Die Grinder



360° Adjust Side Exhaust



JHD-1103 加長 254mm
Extended 10"

汽缸馬力	Cylinder Power	0.5 hp	372.8 w
夾頭能力	Chuck Capacity	6 mm	1/4 inch
空轉轉速	Free Speed	20,000 rpm	
工具重量	Product Weight	1.5 kg	3.3 lb
工具長度	Product Length	446 mm	17.39 inch
空氣消耗	Air Consumption	141 l/min	5 cfm
進氣壓力	Air Inlet Pressure	6.3 kg/cm2	90 psi
進氣接頭	Air Inlet Size	1/4 inch	
風管內徑	Air Hose I.D.	3/8 inch	
噪音值	Sound Pressure	83.5 dB(A)	
震動值	Vibration Level	<2.5 m/s2	

6PCS/CTN 11.2/12.2 KG CUFT 0.75'

工業級鐵製刻模機 / 旋轉開關
Industry Steel Die Grinder / Rotary switch



360° Adjust Side Exhaust

JHD-1103S 加長 254mm
Extended 10"

汽缸馬力	Cylinder Power	0.5 hp	372.8 w
夾頭能力	Chuck Capacity	6 mm	1/4 inch
空轉轉速	Free Speed	20,000 rpm	
工具重量	Product Weight	1.4 kg	3.08 lb
工具長度	Product Length	457 mm	17.82 inch
空氣消耗	Air Consumption	141 l/min	5 cfm
進氣壓力	Air Inlet Pressure	6.3 kg/cm2	90 psi
進氣接頭	Air Inlet Size	1/4 inch	
風管內徑	Air Hose I.D.	3/8 inch	
噪音值	Sound Pressure	83.5 dB(A)	
震動值	Vibration Level	<2.5 m/s2	

6PCS/CTN 11.2/12.2 KG CUFT 0.75'

工業級90度鐵製刻模機
Industry Angle Steel Die Grinder



360° Adjust Side Exhaust

JHD-1105

汽缸馬力	Cylinder Power	0.5 hp	372.8 w
夾頭能力	Chuck Capacity	6 mm	1/4 inch
空轉轉速	Free Speed	14,000 rpm	
工具重量	Product Weight	1.3 kg	2.86 lb
工具長度	Product Length	216 mm	8.43 inch
空氣消耗	Air Consumption	141 l/min	5 cfm
進氣壓力	Air Inlet Pressure	6.3 kg/cm2	90 psi
進氣接頭	Air Inlet Size	1/4 inch	
風管內徑	Air Hose I.D.	3/8 inch	
噪音值	Sound Pressure	83.5 dB(A)	
震動值	Vibration Level	5 m/s2	

工業級鐵製90度刻模機 / 旋轉開關
Industry Angle Steel Die Grinder / Rotary switch



360° Adjust Side Exhaust

JHD-1105S

汽缸馬力	Cylinder Power	0.5 hp	372.8 w
夾頭能力	Chuck Capacity	6 mm	1/4 inch
空轉轉速	Free Speed	14,000 rpm	
工具重量	Product Weight	1.2 kg	2.64 lb
工具長度	Product Length	223 mm	8.85 inch
空氣消耗	Air Consumption	141 l/min	5 cfm
進氣壓力	Air Inlet Pressure	6.3 kg/cm2	90 psi
進氣接頭	Air Inlet Size	1/4 inch	
風管內徑	Air Hose I.D.	3/8 inch	
噪音值	Sound Pressure	83.5 dB(A)	
震動值	Vibration Level	5 m/s2	

工業級90度鐵製刻模機
Industry Angle Steel Die Grinder



360° Adjust Side Exhaust

JHD-1136 加長 127mm
Extended 5"

汽缸馬力	Cylinder Power	0.5 hp	372.8 w
夾頭能力	Chuck Capacity	6 mm	1/4 inch
空轉轉速	Free Speed	16,000 rpm	
工具重量	Product Weight	1.7 kg	3.74 lb
工具長度	Product Length	361 mm	14.08 inch
空氣消耗	Air Consumption	141 l/min	5 cfm
進氣壓力	Air Inlet Pressure	6.3 kg/cm2	90 psi
進氣接頭	Air Inlet Size	1/4 inch	
風管內徑	Air Hose I.D.	3/8 inch	
噪音值	Sound Pressure	83.5 dB(A)	
震動值	Vibration Level	5 m/s2	

工業級90度鐵製高速氣鑽
Industry Angle Steel High Speed Drill



360° Adjust Side Exhaust

JHE-1137 加長 127mm
Extended 5"

汽缸馬力	Cylinder Power	0.5 hp	372.8 w
夾頭能力	Chuck Capacity	6 mm	1/4 inch
空轉轉速	Free Speed	16,000 rpm	
工具重量	Product Weight	1.9 kg	4.18 lb
工具長度	Product Length	361 mm	14.08 inch
空氣消耗	Air Consumption	141 l/min	5 cfm
進氣壓力	Air Inlet Pressure	6.3 kg/cm2	90 psi
進氣接頭	Air Inlet Size	1/4 inch	
風管內徑	Air Hose I.D.	3/8 inch	
噪音值	Sound Pressure	83.5 dB(A)	
震動值	Vibration Level	5 m/s2	

工業級90度鐵製刻模機
Industry Angle Steel Die Grinder



360° Adjust Side Exhaust

JHD-1139 加長 203mm
Extended 8"

汽缸馬力	Cylinder Power	0.5 hp	372.8 w
夾頭能力	Chuck Capacity	6 mm	1/4 inch
空轉轉速	Free Speed	16,000 rpm	
工具重量	Product Weight	2.0 kg	4.4 lb
工具長度	Product Length	488 mm	19.03 inch
空氣消耗	Air Consumption	141 l/min	5 cfm
進氣壓力	Air Inlet Pressure	6.3 kg/cm2	90 psi
進氣接頭	Air Inlet Size	1/4 inch	
風管內徑	Air Hose I.D.	3/8 inch	
噪音值	Sound Pressure	83.5 dB(A)	
震動值	Vibration Level	5 m/s2	

工業級90度鐵製高速氣鑽
Industry Angle Steel High Speed Drill



JHE-1140

加長 203mm
Extended 8"

汽缸馬力	Cylinder Power	0.5 hp	372.8 w
夾頭能力	Chuck Capacity	6 mm	1/4 inch
空轉轉速	Free Speed	16,000 rpm	
工具重量	Product Weight	2.1 kg	4.6 lb
工具長度	Product Length	488 mm	19.03 inch
空氣消耗	Air Consumption	141 l/min	5 cfm
進氣壓力	Air Inlet Pressure	6.3 kg/cm2	90 psi
進氣接頭	Air Inlet Size	1/4 inch	
風管內徑	Air Hose I.D.	3/8 inch	
噪音值	Sound Pressure	83.5 dB(A)	
震動值	Vibration Level	<2.5 m/s2	

工業級鐵製角磨機
Industry Steel Angle Grinder



JHD-1104

汽缸馬力	Cylinder Power	0.5 hp	372.9 w
砂輪尺寸	Wheel Size	75 mm	3 inch
主軸螺紋	Spindle Thread	3/8" ~24UNF	
空轉轉速	Free Speed	14,000 rpm	
工具重量	Product Weight	1.4 kg	3.08 lb
工具長度	Product Length	216 mm	8.43 inch
空氣消耗	Air Consumption	141 l/min	5 cfm
進氣壓力	Air Inlet Pressure	6.3 kg/cm2	90 psi
進氣接頭	Air Inlet Size	1/4 inch	
風管內徑	Air Hose I.D.	3/8 inch	
噪音值	Sound Pressure	83.5 dB(A)	
震動值	Vibration Level	4.5 m/s2	

20PCS/CTN 32/33 KG CUFT 1.1'

工業級鐵製角磨機 / 旋轉開關
Industry Steel Angle Grinder / Rotary switch



JHD-1104S

汽缸馬力	Cylinder Power	0.5 hp	372.9 w
砂輪尺寸	Wheel Size	75 mm	3 inch
主軸螺紋	Spindle Thread	3/8" ~24UNF	
空轉轉速	Free Speed	14,000 rpm	
工具重量	Product Weight	1.3 kg	2.86 lb
工具長度	Product Length	223 mm	8.85 inch
空氣消耗	Air Consumption	141 l/min	5 cfm
進氣壓力	Air Inlet Pressure	6.3 kg/cm2	90 psi
進氣接頭	Air Inlet Size	1/4 inch	
風管內徑	Air Hose I.D.	3/8 inch	
噪音值	Sound Pressure	83.5 dB(A)	
震動值	Vibration Level	4.5 m/s2	

20PCS/CTN 31/32 KG CUFT 1.1'

工業級鐵製角磨機/切割機
Industry Steel Angle Grinder / Cut Off Tool



JHD-1138		加長 127mm Extended 5"	
汽缸馬力	Cylinder Power	0.5 hp	372.9 w
砂輪尺寸	Wheel Size	100 mm	4 inch
主軸螺紋	Spindle Thread	3/8" - 24UNF	
空轉轉速	Free Speed	12,000 rpm	
工具重量	Product Weight	2.1 kg	4.62 lb
工具長度	Product Length	361 mm	14.08 inch
空氣消耗	Air Consumption	141 l/min	5 cfm
進氣壓力	Air Inlet Pressure	6.3 kg/cm2	90 psi
進氣接頭	Air Inlet Size	1/4 inch	
風管內徑	Air Hose I.D.	3/8 inch	
噪音值	Sound Pressure	83.5 dB(A)	
震動值	Vibration Level	4.5 m/s2	

工業級鐵製角磨機 / 切割機
Industry Steel Angle Grinder / Cut Off Tool



JHD-1179		加長 203mm Extended 8"	
汽缸馬力	Cylinder Power	0.5 hp	372.9 w
砂輪尺寸	Wheel Size	100 mm	4 inch
主軸螺紋	Spindle Thread	3/8" - 24UNF	
空轉轉速	Free Speed	12,000 rpm	
工具重量	Product Weight	2.1 kg	4.6 lb
工具長度	Product Length	488 mm	19.03 inch
空氣消耗	Air Consumption	141 l/min	5 cfm
進氣壓力	Air Inlet Pressure	6.3 kg/cm2	90 psi
進氣接頭	Air Inlet Size	1/4 inch	
風管內徑	Air Hose I.D.	3/8 inch	
噪音值	Sound Pressure	83.5 dB(A)	
震動值	Vibration Level	4.5 m/s2	

工業級鐵製刻模機
Industry Steel Die Grinder



JHD-1083			
汽缸馬力	Cylinder Power	1 hp	745.7 w
夾頭能力	Collect Capacity	8 mm	3/8 inch
空轉轉速	Free Speed	22,000 rpm	
工具重量	Product Weight	1.2 kg	2.64 lb
工具長度	Product Length	166 mm	6.47 inch
空氣消耗	Air Consumption	282 l/min	10 cfm
進氣壓力	Air Inlet Pressure	6.3 kg/cm2	90 psi
進氣接頭	Air Inlet Size	1/4 inch	
風管內徑	Air Hose I.D.	3/8 inch	
噪音值	Sound Pressure	88.5 dB(A)	
震動值	Vibration Level	<2.5 m/s2	

20PCS/CTN 21.3/22.3 KG CUFT 1.1'

工業級鐵製刻模機 / 旋轉開關
Industry Steel Die Grinder / Rotary switch



JHD-1083S

汽缸馬力	Cylinder Power	1 hp	745.7 w
夾頭能力	Collect Capacity	8 mm	3/8 inch
空轉轉速	Free Speed	22,000 rpm	
工具重量	Product Weight	1.2 kg	2.64 lb
工具長度	Product Length	170 mm	6.63 inch
空氣消耗	Air Consumption	282 l/min	10 cfm
進氣壓力	Air Inlet Pressure	6.3 kg/cm2	90 psi
進氣接頭	Air Inlet Size	1/4 inch	
風管內徑	Air Hose I.D.	3/8 inch	
噪音值	Sound Pressure	88.5 dB(A)	
震動值	Vibration Level	<2.5 m/s2	

20PCS/CTN 21.3/22.3 KG CUFT 1.1'

工業級鐵製刻模機
Industry Steel Die Grinder



JHD-1082

加長 127mm
Extended 5"

汽缸馬力	Cylinder Power	1 hp	745.7 w
夾頭能力	Collect Capacity	8 mm	3/8 inch
空轉轉速	Free Speed	22,000 rpm	
工具重量	Product Weight	1.65 kg	3.63 lb
工具長度	Product Length	315 mm	12.28 inch
空氣消耗	Air Consumption	282 l/min	10 cfm
進氣壓力	Air Inlet Pressure	6.3 kg/cm2	90 psi
進氣接頭	Air Inlet Size	1/4 inch	
風管內徑	Air Hose I.D.	3/8 inch	
噪音值	Sound Pressure	83.5 dB(A)	
震動值	Vibration Level	<2.5 m/s2	

12PCS/CTN 27.7/28.7 KG CUFT 1'

工業級鐵製刻模機 / 旋轉開關
Industry Steel Die Grinder / Rotary switch



JHD-1082S

加長 127mm
Extended 5"

汽缸馬力	Cylinder Power	1 hp	745.7 w
夾頭能力	Collect Capacity	8 mm	3/8 inch
空轉轉速	Free Speed	22,000 rpm	
工具重量	Product Weight	1.65 kg	3.63 lb
工具長度	Product Length	319 mm	12.44 inch
空氣消耗	Air Consumption	282 l/min	10 cfm
進氣壓力	Air Inlet Pressure	6.3 kg/cm2	90 psi
進氣接頭	Air Inlet Size	1/4 inch	
風管內徑	Air Hose I.D.	3/8 inch	
噪音值	Sound Pressure	83.5 dB(A)	
震動值	Vibration Level	<2.5 m/s2	

12PCS/CTN 27.7/28.7 KG CUFT 1'

工業級鐵製刻模機
Industry Steel Die Grinder



JHD-1082L

加長 406mm
Extended 16"

汽缸馬力	Cylinder Power	1 hp	745.7 w
夾頭能力	Collect Capacity	8 mm	3/8 inch
空轉轉速	Free Speed	20,000 rpm	
工具重量	Product Weight	2.8 kg	6.16 lb
工具長度	Product Length	600 mm	23.4 inch
空氣消耗	Air Consumption	282 l/min	10 cfm
進氣壓力	Air Inlet Pressure	6.3 kg/cm2	90 psi
進氣接頭	Air Inlet Size	1/4 inch	
風管內徑	Air Hose I.D.	3/8 inch	
噪音值	Sound Pressure	83.5 dB(A)	
震動值	Vibration Level	<2.5 m/s2	

工業級鐵製刻模機 / 旋轉開關
Industry Steel Die Grinder / Rotary switch



JHD-1082SL

加長 406mm
Extended 16"

汽缸馬力	Cylinder Power	1 hp	745.7 w
夾頭能力	Collect Capacity	8 mm	3/8 inch
空轉轉速	Free Speed	20,000 rpm	
工具重量	Product Weight	2.8 kg	6.16 lb
工具長度	Product Length	604 mm	23.55 inch
空氣消耗	Air Consumption	282 l/min	10 cfm
進氣壓力	Air Inlet Pressure	6.3 kg/cm2	90 psi
進氣接頭	Air Inlet Size	1/4 inch	
風管內徑	Air Hose I.D.	3/8 inch	
噪音值	Sound Pressure	83.5 dB(A)	
震動值	Vibration Level	<2.5 m/s2	

工業級鐵製刻模機
Industry Steel Die Grinder



JHD-1082XL

加長 838mm
Extended 33 "

汽缸馬力	Cylinder Power	1 hp	745.7 w
夾頭能力	Collect Capacity	8 mm	3/8 inch
空轉轉速	Free Speed	20,000 rpm	
工具重量	Product Weight	4.7 kg	10.34 lb
工具長度	Product Length	1,030 mm	40.17 inch
空氣消耗	Air Consumption	282 l/min	10 cfm
進氣壓力	Air Inlet Pressure	6.3 kg/cm2	90 psi
進氣接頭	Air Inlet Size	1/4 inch	
風管內徑	Air Hose I.D.	3/8 inch	
噪音值	Sound Pressure	83.5 dB(A)	
震動值	Vibration Level	<2.5 m/s2	

工業級鐵製刻模機 / 旋轉開關
Industry Steel Die Grinder / Rotary switch



360° Adjust Side Exhaust

JHD-1082SXL 加長 838mm
Extended 33"

汽缸馬力	Cylinder Power	1 hp	745.7 w
夾頭能力	Collect Capacity	8 mm	3/8 inch
空轉轉速	Free Speed	20,000 rpm	
工具重量	Product Weight	4.7 kg	10.34 lb
工具長度	Product Length	1,034 mm	40.32 inch
空氣消耗	Air Consumption	282 l/min	10 cfm
進氣壓力	Air Inlet Pressure	6.3 kg/cm2	90 psi
進氣接頭	Air Inlet Size	1/4 inch	
風管內徑	Air Hose I.D.	3/8 inch	
噪音值	Sound Pressure	83.5 dB(A)	
震動值	Vibration Level	<2.5 m/s2	

工業級90度鐵製刻模機
Industry Angle Steel Die Grinder



360° Adjust Side Exhaust

JHD-1115 加長 50mm
Extended 2"

汽缸馬力	Cylinder Power	1 hp	745.7 w
夾頭能力	Collect Capacity	6 mm	1/4 inch
空轉轉速	Free Speed	12,000 rpm	
工具重量	Product Weight	1.9 kg	4.18 lb
工具長度	Product Length	264 mm	10.29 inch
空氣消耗	Air Consumption	282 l/min	10 cfm
進氣壓力	Air Inlet Pressure	6.3 kg/cm2	90 psi
進氣接頭	Air Inlet Size	1/4 inch	
風管內徑	Air Hose I.D.	3/8 inch	
噪音值	Sound Pressure	83.5 dB(A)	
震動值	Vibration Level	5 m/s2	

工業級90度鐵製高速氣鑽
Industry Angle Steel High Speed Drill



360° Adjust Side Exhaust

JHE-1114 加長 50mm
Extended 2"

汽缸馬力	Cylinder Power	1 hp	745.7 w
夾頭能力	Chuck Capacity	6 mm	1/4 inch
空轉轉速	Free Speed	12,000 rpm	
工具重量	Product Weight	2.0 kg	4.4 lb
工具長度	Product Length	264 mm	10.29 inch
空氣消耗	Air Consumption	282 l/min	10 cfm
進氣壓力	Air Inlet Pressure	6.3 kg/cm2	90 psi
進氣接頭	Air Inlet Size	1/4 inch	
風管內徑	Air Hose I.D.	3/8 inch	
噪音值	Sound Pressure	83.5 dB(A)	
震動值	Vibration Level	5 m/s2	

工業級鐵製角磨機 / 切割機
Industry Steel Angle Grinder / Cut Off Tool



JHD-1080

加長 50.8mm
Extended 2"

汽缸馬力	Cylinder Power	1 hp	745 w
砂輪尺寸	Wheel Size	100 mm	4 inch
主軸螺紋	Spindle Thread		
空轉轉速	Free Speed	13,500 rpm	
工具重量	Product Weight	2.0 kg	4.4 lb
工具長度	Product Length	270 mm	10.53 inch
空氣消耗	Air Consumption	282 l/min	10 cfm
進氣壓力	Air Inlet Pressure	6.3 kg/cm2	90 psi
進氣接頭	Air Inlet Size	1/4 inch	
風管內徑	Air Hose I.D.	3/8 inch	
噪音值	Sound Pressure	83.5 dB(A)	
震動值	Vibration Level	4.5 m/s2	

工業級鐵製氣鑽
IndustrySteel Air Drill



JHE-112

汽缸馬力	Cylinder Power	0.5 hp	372.8 w
夾頭能力	Chuck Capacity	6 mm	1/4 inch
空轉轉速	Free Speed	5,000 rpm	
工具重量	Product Weight	1.3 kg	2.86 lb
工具長度	Product Length	208 mm	8.11 inch
空氣消耗	Air Consumption	141 l/min	5 cfm
進氣壓力	Air Inlet Pressure	6.3 kg/cm2	90 psi
進氣接頭	Air Inlet Size	1/4 inch	
風管內徑	Air Hose I.D.	3/8 inch	
噪音值	Sound Pressure	83.5 dB(A)	
震動值	Vibration Level	<2.5 m/s2	

工業級刻模機 / 無開關
Industry Die Grinder / No switch



JHD-1071

汽缸馬力	Cylinder Power	0.3 hp	223.7 w
夾頭能力	Collect Capacity	6 mm	1/4 inch
空轉轉速	Free Speed	20,000 rpm	
工具重量	Product Weight	0.4 kg	0.88 lb
工具長度	Product Length	150 mm	5.85 inch
空氣消耗	Air Consumption	84 l/min	3 cfm
進氣壓力	Air Inlet Pressure	6.3 kg/cm2	90 psi
進氣接頭	Air Inlet Size	1/4 inch	
風管內徑	Air Hose I.D.	3/8 inch	
噪音值	Sound Pressure	83.5 dB(A)	
震動值	Vibration Level	<2.5 m/s2	

20PCS/CTN 14/15 KG CUFT 1.2'

90度氣動拋光機
Angle Air Polisher



JHD-1034

磨盤尺寸	Pad Size	75 mm	3 inch
主軸螺紋	Spindle Thread	5/16" - 24UNF	
軌道直徑	Orbit Diameter	N/A	
空轉轉速	Free Speed	2,500 rpm	
工具重量	Product Weight	0.81 kg	1.78 lb
工具長度	Product Length	190 mm	7.48 inch
空氣消耗	Air Consumption	84 l/min	3 cfm
進氣壓力	Air Inlet Pressure	6.3 kg/cm2	90 psi
進氣接頭	Air Inlet Size	1/4 inch	
風管內徑	Air Hose I.D.	3/8 inch	
噪音值	Sound Pressure	82 dB(A)	
震動值	Vibration Level	<2.5 m/s2	

20PCS/CTN 15/16 KG CUFT 1.2'

90度軌道式磨光機
Angle Random Orbital Sander



JHF-1047

磨盤尺寸	Pad Size	75 mm	3 inch
主軸螺紋	Spindle Thread	5/16" - 24UNF	
軌道直徑	Orbit Diameter	3 mm	0.12 inch
空轉轉速	Free Speed	9,000 rpm	
工具重量	Product Weight	0.7 kg	1.54 lb
工具長度	Product Length	190 mm	7.48 inch
空氣消耗	Air Consumption	84 l/min	3 cfm
進氣壓力	Air Inlet Pressure	6.3 kg/cm2	90 psi
進氣接頭	Air Inlet Size	1/4 inch	
風管內徑	Air Hose I.D.	3/8 inch	
噪音值	Sound Pressure	82 dB(A)	
震動值	Vibration Level	<2.5 m/s2	

20PCS/CTN 19/20 KG CUFT 1.24'

無軌道式氣動磨光機
Rotary Motion Sander



JHD-1188

磨盤尺寸	Pad Size	100 mm	4 inch
主軸螺紋	Spindle Thread	5/16" - 24UNF	
軌道直徑	Orbit Diameter	N/A	
空轉轉速	Free Speed	12,500 rpm	
工具重量	Product Weight	0.78 kg	1.71 lb
工具長度	Product Length	120 mm	4.68 inch
空氣消耗	Air Consumption	530 l/min	18.7 cfm
進氣壓力	Air Inlet Pressure	6.3 kg/cm2	90 psi
進氣接頭	Air Inlet Size	1/4 inch	
風管內徑	Air Hose I.D.	3/8 inch	
噪音值	Sound Pressure	87 dB(A)	
震動值	Vibration Level	<2.5 m/s2	

10PCS/CTN 7.6/8.6 KG CUFT 1.9'

軌道式氣動磨光機
Random Orbital Sander



JHF-1180-5

磨盤尺寸	Pad Size	36 mm	1-1/2 inch
主軸螺紋	Spindle Thread	5/16" - 24UNF	
軌道直徑	Orbit Diameter	5 mm	5/16 inch
空轉轉速	Free Speed	7,500 rpm	
工具重量	Product Weight	0.76 kg	1.67 lb
工具長度	Product Length	120 mm	4.68 inch
空氣消耗	Air Consumption	380 l/min	13.4 cfm
進氣壓力	Air Inlet Pressure	6.3 kg/cm2	90 psi
進氣接頭	Air Inlet Size	1/4 inch	
風管內徑	Air Hose I.D.	3/8 inch	
噪音值	Sound Pressure	83 dB(A)	
震動值	Vibration Level	<2.5 m/s2	

10PCS/CTN 7.6/8.6 KG CUFT 1.9'

軌道式氣動磨光機
Random Orbital Sander



JHF-1181-5

磨盤尺寸	Pad Size	75 mm	3 inch
主軸螺紋	Spindle Thread	5/16" - 24UNF	
軌道直徑	Orbit Diameter	5 mm	5/16 inch
空轉轉速	Free Speed	12,000 rpm	
工具重量	Product Weight	0.87 kg	1.91 lb
工具長度	Product Length	120 mm	4.68 inch
空氣消耗	Air Consumption	530 l/min	18.7 cfm
進氣壓力	Air Inlet Pressure	6.3 kg/cm2	90 psi
進氣接頭	Air Inlet Size	1/4 inch	
風管內徑	Air Hose I.D.	3/8 inch	
噪音值	Sound Pressure	83 dB(A)	
震動值	Vibration Level	<2.5 m/s2	

10PCS/CTN 9/10 KG CUFT 1.9'

軌道式氣動磨光機
Random Orbital Sander



JHF-1181-15

磨盤尺寸	Pad Size	75 mm	3 inch
主軸螺紋	Spindle Thread	5/16" - 24UNF	
軌道直徑	Orbit Diameter	15 mm	5/8 inch
空轉轉速	Free Speed	12,000 rpm	
工具重量	Product Weight	0.87 kg	1.91 lb
工具長度	Product Length	120 mm	4.68 inch
空氣消耗	Air Consumption	530 l/min	18.7 cfm
進氣壓力	Air Inlet Pressure	6.3 kg/cm2	90 psi
進氣接頭	Air Inlet Size	1/4 inch	
風管內徑	Air Hose I.D.	3/8 inch	
噪音值	Sound Pressure	83 dB(A)	
震動值	Vibration Level	<2.5 m/s2	

10PCS/CTN 9/10 KG CUFT 1.9'

軌道式氣動磨光機
Random Orbital Sander



JHF-1185-25

磨盤尺寸	Pad Size	127 mm	5 inch
主軸螺紋	Spindle Thread	5/16" - 24UNF	
軌道直徑	Orbit Diameter	2.5 mm	3/32 inch
空轉轉速	Free Speed	12,000 rpm	
工具重量	Product Weight	0.9 kg	1.98 lb
工具長度	Product Length	155 mm	6.04 inch
空氣消耗	Air Consumption	530 l/min	18.7 cfm
進氣壓力	Air Inlet Pressure	6.3 kg/cm2	90 psi
進氣接頭	Air Inlet Size	1/4 inch	
風管內徑	Air Hose I.D.	3/8 inch	
噪音值	Sound Pressure	83 dB(A)	
震動值	Vibration Level	<2.5 m/s2	

10PCS/CTN 9/10 KG CUFT 1.9'

軌道式氣動磨光機
Random Orbital Sander



JHF-1185-5

磨盤尺寸	Pad Size	127 mm	5 inch
主軸螺紋	Spindle Thread	5/16" - 24UNF	
軌道直徑	Orbit Diameter	5 mm	5/16 inch
空轉轉速	Free Speed	12,000 rpm	
工具重量	Product Weight	0.9 kg	1.98 lb
工具長度	Product Length	155 mm	6.04 inch
空氣消耗	Air Consumption	530 l/min	18.7 cfm
進氣壓力	Air Inlet Pressure	6.3 kg/cm2	90 psi
進氣接頭	Air Inlet Size	1/4 inch	
風管內徑	Air Hose I.D.	3/8 inch	
噪音值	Sound Pressure	83 dB(A)	
震動值	Vibration Level	<2.5 m/s2	

10PCS/CTN 9/10 KG CUFT 1.9'

軌道式氣動磨光機
Random Orbital Sander



JHF-1185-8

磨盤尺寸	Pad Size	127 mm	5 inch
主軸螺紋	Spindle Thread	5/16" - 24UNF	
軌道直徑	Orbit Diameter	8 mm	3/16 inch
空轉轉速	Free Speed	12,000 rpm	
工具重量	Product Weight	0.9 kg	1.98 lb
工具長度	Product Length	155 mm	6.04 inch
空氣消耗	Air Consumption	530 l/min	18.7 cfm
進氣壓力	Air Inlet Pressure	6.3 kg/cm2	90 psi
進氣接頭	Air Inlet Size	1/4 inch	
風管內徑	Air Hose I.D.	3/8 inch	
噪音值	Sound Pressure	83 dB(A)	
震動值	Vibration Level	<2.5 m/s2	

10PCS/CTN 9/10 KG CUFT 1.9'

軌道式氣動磨光機
Random Orbital Sander



JHF-1182-25

磨盤尺寸	Pad Size	75 mm	6 inch
主軸螺紋	Spindle Thread	5/16" - 24UNF	
軌道直徑	Orbit Diameter	2.5 mm	3/32 inch
空轉轉速	Free Speed	11,000 rpm	
工具重量	Product Weight	0.95 kg	2.09 lb
工具長度	Product Length	155 mm	6.04 inch
空氣消耗	Air Consumption	530 l/min	18.7 cfm
進氣壓力	Air Inlet Pressure	6.3 kg/cm2	90 psi
進氣接頭	Air Inlet Size	1/4 inch	
風管內徑	Air Hose I.D.	3/8 inch	
噪音值	Sound Pressure	83 dB(A)	
震動值	Vibration Level	<2.5 m/s2	

10PCS/CTN 9.5/10.5 KG CUFT 1.9'

軌道式氣動磨光機
Random Orbital Sander



JHF-1182-5

磨盤尺寸	Pad Size	152 mm	6 inch
主軸螺紋	Spindle Thread	5/16" - 24UNF	
軌道直徑	Orbit Diameter	5 mm	5/16 inch
空轉轉速	Free Speed	11,000 rpm	
工具重量	Product Weight	0.95 kg	2.09 lb
工具長度	Product Length	155 mm	6.04 inch
空氣消耗	Air Consumption	530 l/min	18.7 cfm
進氣壓力	Air Inlet Pressure	6.3 kg/cm2	90 psi
進氣接頭	Air Inlet Size	1/4 inch	
風管內徑	Air Hose I.D.	3/8 inch	
噪音值	Sound Pressure	83 dB(A)	
震動值	Vibration Level	<2.5 m/s2	

10PCS/CTN 9.5/10.5 KG CUFT 1.9'

軌道式氣動磨光機
Random Orbital Sander



JHF-1182-8

磨盤尺寸	Pad Size	152 mm	6 inch
主軸螺紋	Spindle Thread	5/16" - 24UNF	
軌道直徑	Orbit Diameter	8 mm	3/16 inch
空轉轉速	Free Speed	11,000 rpm	
工具重量	Product Weight	0.95 kg	2.09 lb
工具長度	Product Length	155 mm	6.04 inch
空氣消耗	Air Consumption	530 l/min	18.7 cfm
進氣壓力	Air Inlet Pressure	6.3 kg/cm2	90 psi
進氣接頭	Air Inlet Size	1/4 inch	
風管內徑	Air Hose I.D.	3/8 inch	
噪音值	Sound Pressure	83 dB(A)	
震動值	Vibration Level	<2.5 m/s2	

10PCS/CTN 9.5/10.5 KG CUFT 1.9'

軌道式氣動磨光機/中央集塵
Random Orbital Sander / Central Vacuum



JHF-1186-25

磨盤尺寸	Pad Size	127 mm	5 inch
主軸螺紋	Spindle Thread	5/16" - 24UNF	
軌道直徑	Orbit Diameter	2.5 mm	3/32 inch
空轉轉速	Free Speed	11,000 rpm	
工具重量	Product Weight	0.99 kg	2.18 lb
工具長度	Product Length	215 mm	8.38 inch
空氣消耗	Air Consumption	530 l/min	18.7 cfm
進氣壓力	Air Inlet Pressure	6.3 kg/cm2	90 psi
進氣接頭	Air Inlet Size	1/4 inch	
風管內徑	Air Hose I.D.	3/8 inch	
噪音值	Sound Pressure	83 dB(A)	
震動值	Vibration Level	<2.5 m/s2	

10PCS/CTN 10/11 KG CUFT 1.9'

軌道式氣動磨光機/中央集塵
Random Orbital Sander / Central Vacuum



JHF-1186-5

磨盤尺寸	Pad Size	127 mm	5 inch
主軸螺紋	Spindle Thread	5/16" - 24UNF	
軌道直徑	Orbit Diameter	5 mm	5/16 inch
空轉轉速	Free Speed	11,000 rpm	
工具重量	Product Weight	0.99 kg	2.18 lb
工具長度	Product Length	215 mm	8.38 inch
空氣消耗	Air Consumption	530 l/min	18.7 cfm
進氣壓力	Air Inlet Pressure	6.3 kg/cm2	90 psi
進氣接頭	Air Inlet Size	1/4 inch	
風管內徑	Air Hose I.D.	3/8 inch	
噪音值	Sound Pressure	83 dB(A)	
震動值	Vibration Level	<2.5 m/s2	

10PCS/CTN 10/11 KG CUFT 1.9'

軌道式氣動磨光機/中央集塵
Random Orbital Sander / Central Vacuum



JHF-1186-8

磨盤尺寸	Pad Size	127 mm	5 inch
主軸螺紋	Spindle Thread	5/16" - 24UNF	
軌道直徑	Orbit Diameter	8 mm	3/16 inch
空轉轉速	Free Speed	11,000 rpm	
工具重量	Product Weight	0.99 kg	2.18 lb
工具長度	Product Length	215 mm	8.38 inch
空氣消耗	Air Consumption	530 l/min	18.7 cfm
進氣壓力	Air Inlet Pressure	6.3 kg/cm2	90 psi
進氣接頭	Air Inlet Size	1/4 inch	
風管內徑	Air Hose I.D.	3/8 inch	
噪音值	Sound Pressure	83 dB(A)	
震動值	Vibration Level	<2.5 m/s2	

10PCS/CTN 10/11 KG CUFT 1.9'

軌道式氣動磨光機/中央集塵
Random Orbital Sander / Central Vacuum



JHF-1183-25

磨盤尺寸	Pad Size	152 mm	6 inch
主軸螺紋	Spindle Thread	5/16" - 24UNF	
軌道直徑	Orbit Diameter	2.5 mm	3/32 inch
空轉轉速	Free Speed	11,000 rpm	
工具重量	Product Weight	0.99 kg	2.18 lb
工具長度	Product Length	215 mm	8.38 inch
空氣消耗	Air Consumption	530 l/min	18.7 cfm
進氣壓力	Air Inlet Pressure	6.3 kg/cm2	90 psi
進氣接頭	Air Inlet Size	1/4 inch	
風管內徑	Air Hose I.D.	3/8 inch	
噪音值	Sound Pressure	83 dB(A)	
震動值	Vibration Level	<2.5 m/s2	

10PCS/CTN 10/11 KG CUFT 1.9'

軌道式氣動磨光機/中央集塵
Random Orbital Sander / Central Vacuum



JHF-1183-5

磨盤尺寸	Pad Size	152 mm	6 inch
主軸螺紋	Spindle Thread	5/16" - 24UNF	
軌道直徑	Orbit Diameter	5 mm	5/16 inch
空轉轉速	Free Speed	11,000 rpm	
工具重量	Product Weight	0.99 kg	2.18 lb
工具長度	Product Length	215 mm	8.38 inch
空氣消耗	Air Consumption	530 l/min	18.7 cfm
進氣壓力	Air Inlet Pressure	6.3 kg/cm2	90 psi
進氣接頭	Air Inlet Size	1/4 inch	
風管內徑	Air Hose I.D.	3/8 inch	
噪音值	Sound Pressure	83 dB(A)	
震動值	Vibration Level	<2.5 m/s2	

10PCS/CTN 10/11 KG CUFT 1.9'

軌道式氣動磨光機/中央集塵
Random Orbital Sander / Central Vacuum



JHF-1183-8

磨盤尺寸	Pad Size	152 mm	6 inch
主軸螺紋	Spindle Thread	5/16" - 24UNF	
軌道直徑	Orbit Diameter	8 mm	3/16 inch
空轉轉速	Free Speed	11,000 rpm	
工具重量	Product Weight	0.99 kg	2.18 lb
工具長度	Product Length	215 mm	8.38 inch
空氣消耗	Air Consumption	530 l/min	18.7 cfm
進氣壓力	Air Inlet Pressure	6.3 kg/cm2	90 psi
進氣接頭	Air Inlet Size	1/4 inch	
風管內徑	Air Hose I.D.	3/8 inch	
噪音值	Sound Pressure	83 dB(A)	
震動值	Vibration Level	<2.5 m/s2	

10PCS/CTN 10/11 KG CUFT 1.9'

軌道式氣動磨光機 / 自助集塵
Random Orbital Sander / Self Vacuum



JHF-1187-25

磨盤尺寸	Pad Size	127 mm	5 inch
主軸螺紋	Spindle Thread	5/16" - 24UNF	
軌道直徑	Orbit Diameter	2.5 mm	3/32 inch
空轉轉速	Free Speed	11,000 rpm	
工具重量	Product Weight	0.99 kg	2.18 lb
工具長度	Product Length	215 mm	8.38 inch
空氣消耗	Air Consumption	530 l/min	18.7 cfm
進氣壓力	Air Inlet Pressure	6.3 kg/cm2	90 psi
進氣接頭	Air Inlet Size	1/4 inch	
風管內徑	Air Hose I.D.	3/8 inch	
噪音值	Sound Pressure	83 dB(A)	
震動值	Vibration Level	<2.5 m/s2	

10PCS/CTN 10/11 KG CUFT 1.9'

軌道式氣動磨光機 / 中央集塵
Random Orbital Sander / Central Vacuum



JHF-1187-5

磨盤尺寸	Pad Size	127 mm	5 inch
主軸螺紋	Spindle Thread	5/16" - 24UNF	
軌道直徑	Orbit Diameter	5 mm	5/16 inch
空轉轉速	Free Speed	11,000 rpm	
工具重量	Product Weight	0.99 kg	2.18 lb
工具長度	Product Length	215 mm	8.38 inch
空氣消耗	Air Consumption	530 l/min	18.7 cfm
進氣壓力	Air Inlet Pressure	6.3 kg/cm2	90 psi
進氣接頭	Air Inlet Size	1/4 inch	
風管內徑	Air Hose I.D.	3/8 inch	
噪音值	Sound Pressure	83 dB(A)	
震動值	Vibration Level	<2.5 m/s2	

10PCS/CTN 10/11 KG CUFT 1.9'

軌道式氣動磨光機 / 自助集塵
Random Orbital Sander / Self Vacuum



JHF-1187-8

磨盤尺寸	Pad Size	127 mm	5 inch
主軸螺紋	Spindle Thread	5/16" - 24UNF	
軌道直徑	Orbit Diameter	8 mm	3/16 inch
空轉轉速	Free Speed	11,000 rpm	
工具重量	Product Weight	0.99 kg	2.18 lb
工具長度	Product Length	215 mm	8.38 inch
空氣消耗	Air Consumption	530 l/min	18.7 cfm
進氣壓力	Air Inlet Pressure	6.3 kg/cm2	90 psi
進氣接頭	Air Inlet Size	1/4 inch	
風管內徑	Air Hose I.D.	3/8 inch	
噪音值	Sound Pressure	83 dB(A)	
震動值	Vibration Level	<2.5 m/s2	

10PCS/CTN 10/11 KG CUFT 1.9'

軌道式氣動磨光機 / 自助集塵
Random Orbital Sander / Central Vacuum



JHF-1184-25

磨盤尺寸	Pad Size	152 mm	6 inch
主軸螺紋	Spindle Thread	5/16" - 24UNF	
軌道直徑	Orbit Diameter	2.5 mm	3/32 inch
空轉轉速	Free Speed	11,000 rpm	
工具重量	Product Weight	0.99 kg	2.18 lb
工具長度	Product Length	215 mm	8.38 inch
空氣消耗	Air Consumption	530 l/min	18.7 cfm
進氣壓力	Air Inlet Pressure	6.3 kg/cm2	90 psi
進氣接頭	Air Inlet Size	1/4 inch	
風管內徑	Air Hose I.D.	3/8 inch	
噪音值	Sound Pressure	83 dB(A)	
震動值	Vibration Level	<2.5 m/s2	

10PCS/CTN 10/11 KG CUFT 1.9'

軌道式氣動磨光機 / 自助集塵
Random Orbital Sander / Self Vacuum



JHF-1184-5

磨盤尺寸	Pad Size	152 mm	6 inch
主軸螺紋	Spindle Thread	5/16" - 24UNF	
軌道直徑	Orbit Diameter	5 mm	5/16 inch
空轉轉速	Free Speed	11,000 rpm	
工具重量	Product Weight	0.99 kg	2.18 lb
工具長度	Product Length	215 mm	8.38 inch
空氣消耗	Air Consumption	530 l/min	18.7 cfm
進氣壓力	Air Inlet Pressure	6.3 kg/cm2	90 psi
進氣接頭	Air Inlet Size	1/4 inch	
風管內徑	Air Hose I.D.	3/8 inch	
噪音值	Sound Pressure	83 dB(A)	
震動值	Vibration Level	<2.5 m/s2	

10PCS/CTN 10/11 KG CUFT 1.9'

軌道式氣動磨光機 / 自助集塵
Random Orbital Sander / Self Vacuum



JHF-1184-8

磨盤尺寸	Pad Size	152 mm	6 inch
主軸螺紋	Spindle Thread	5/16" - 24UNF	
軌道直徑	Orbit Diameter	8 mm	3/16 inch
空轉轉速	Free Speed	11,000 rpm	
工具重量	Product Weight	0.99 kg	2.18 lb
工具長度	Product Length	215 mm	8.38 inch
空氣消耗	Air Consumption	530 l/min	18.7 cfm
進氣壓力	Air Inlet Pressure	6.3 kg/cm2	90 psi
進氣接頭	Air Inlet Size	1/4 inch	
風管內徑	Air Hose I.D.	3/8 inch	
噪音值	Sound Pressure	83 dB(A)	
震動值	Vibration Level	<2.5 m/s2	

10PCS/CTN 10/11 KG CUFT 1.9'



經銷商/Distributed by

Tokai®

製造商：鉅禾工業有限公司
JU HE INDUSTRY CO., LTD
www.juhe.com.tw

